

WE'VE GOT WHAT IT TAKES!






**Dönges firefighter hatchet DIN 14924-FB
(previous standard 06/1992)**

Red-painted head with ground cutting edge on one side and a narrow pike on the other, an oval tubular steel handle inserted into the head and a non-slip rubber hand guard.

The hatchet no longer complies with the current DIN 14924 since it does not have the integrated bollard wrench. Besides that, the hatchet complies with every other required quality and stability criteria.



Ord. no.	Length mm	Weight g
202010	330	1046

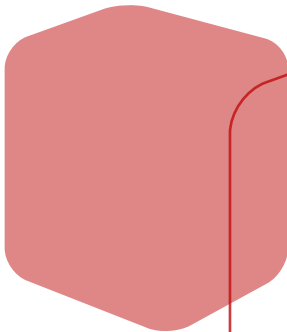

**Dönges Hatchet protection bag similar to
DIN 14924**

Protective holster for firefighter hatchets made from black leather with a belt loop, specially adapted for the new hatchet of top quality leather and finishing.



Features:

- Made from high-quality black leather.
- Optimised fit with practical belt loop.
- Metal-reinforced corners and tab ends for additional stability.
- Specially adapted to the Dönges fire hatchet with triangular head.
- Similar to DIN 14924

Ord. no.	Item	Weight g
202015	Dönges Hatchet protection bag similar to DIN 14924	163

Scope of delivery:
1 pieces Dönges hatchet protection bag



Dönges Fireman hatchet holster with leg holder and additional holster

Due to the fixation on the thigh, a fire brigade hatchet with this special holster can always be carried close to the body to reduce the risk of threading or getting caught.

The holster is attached to fire brigade belt and to the thigh with two adjustable elastic loops. It follows thereby each movement of the user which can be particularly important in the interior attack. Thanks to variable adjustment, the special holster is not only suitable for DIN fire hatchets but also for the Paratech Biel-Tool or even a Paratech Pry-Axe. Similar tools with a handle length of approx. 28 - 40 cm can also be used with this bag.

A hook and loop strap, which is easy to open even with gloves, secures the tool in the holster and allows one-handed removal. A further hook and loop fastener keeps the bag open after removal to make it easy to put back into the tool back.

Reflective elements increase the visibility and an additional hook and loop surface for the attachment of labels is available.

Technical data:

Material:

Nylon fabric

Color:

black



Features:

- Close fitting to the body
- Variable fit
- Robust material
- Adaptable for different tools
- High visibility
- One-handed removal of the axe
- Detachable additional pocket for rescue knife, door wedges, etc.

Ord. no. For stem length cm


Weight g

202020 28-40

460

Delivery without a firefighter's hatchet



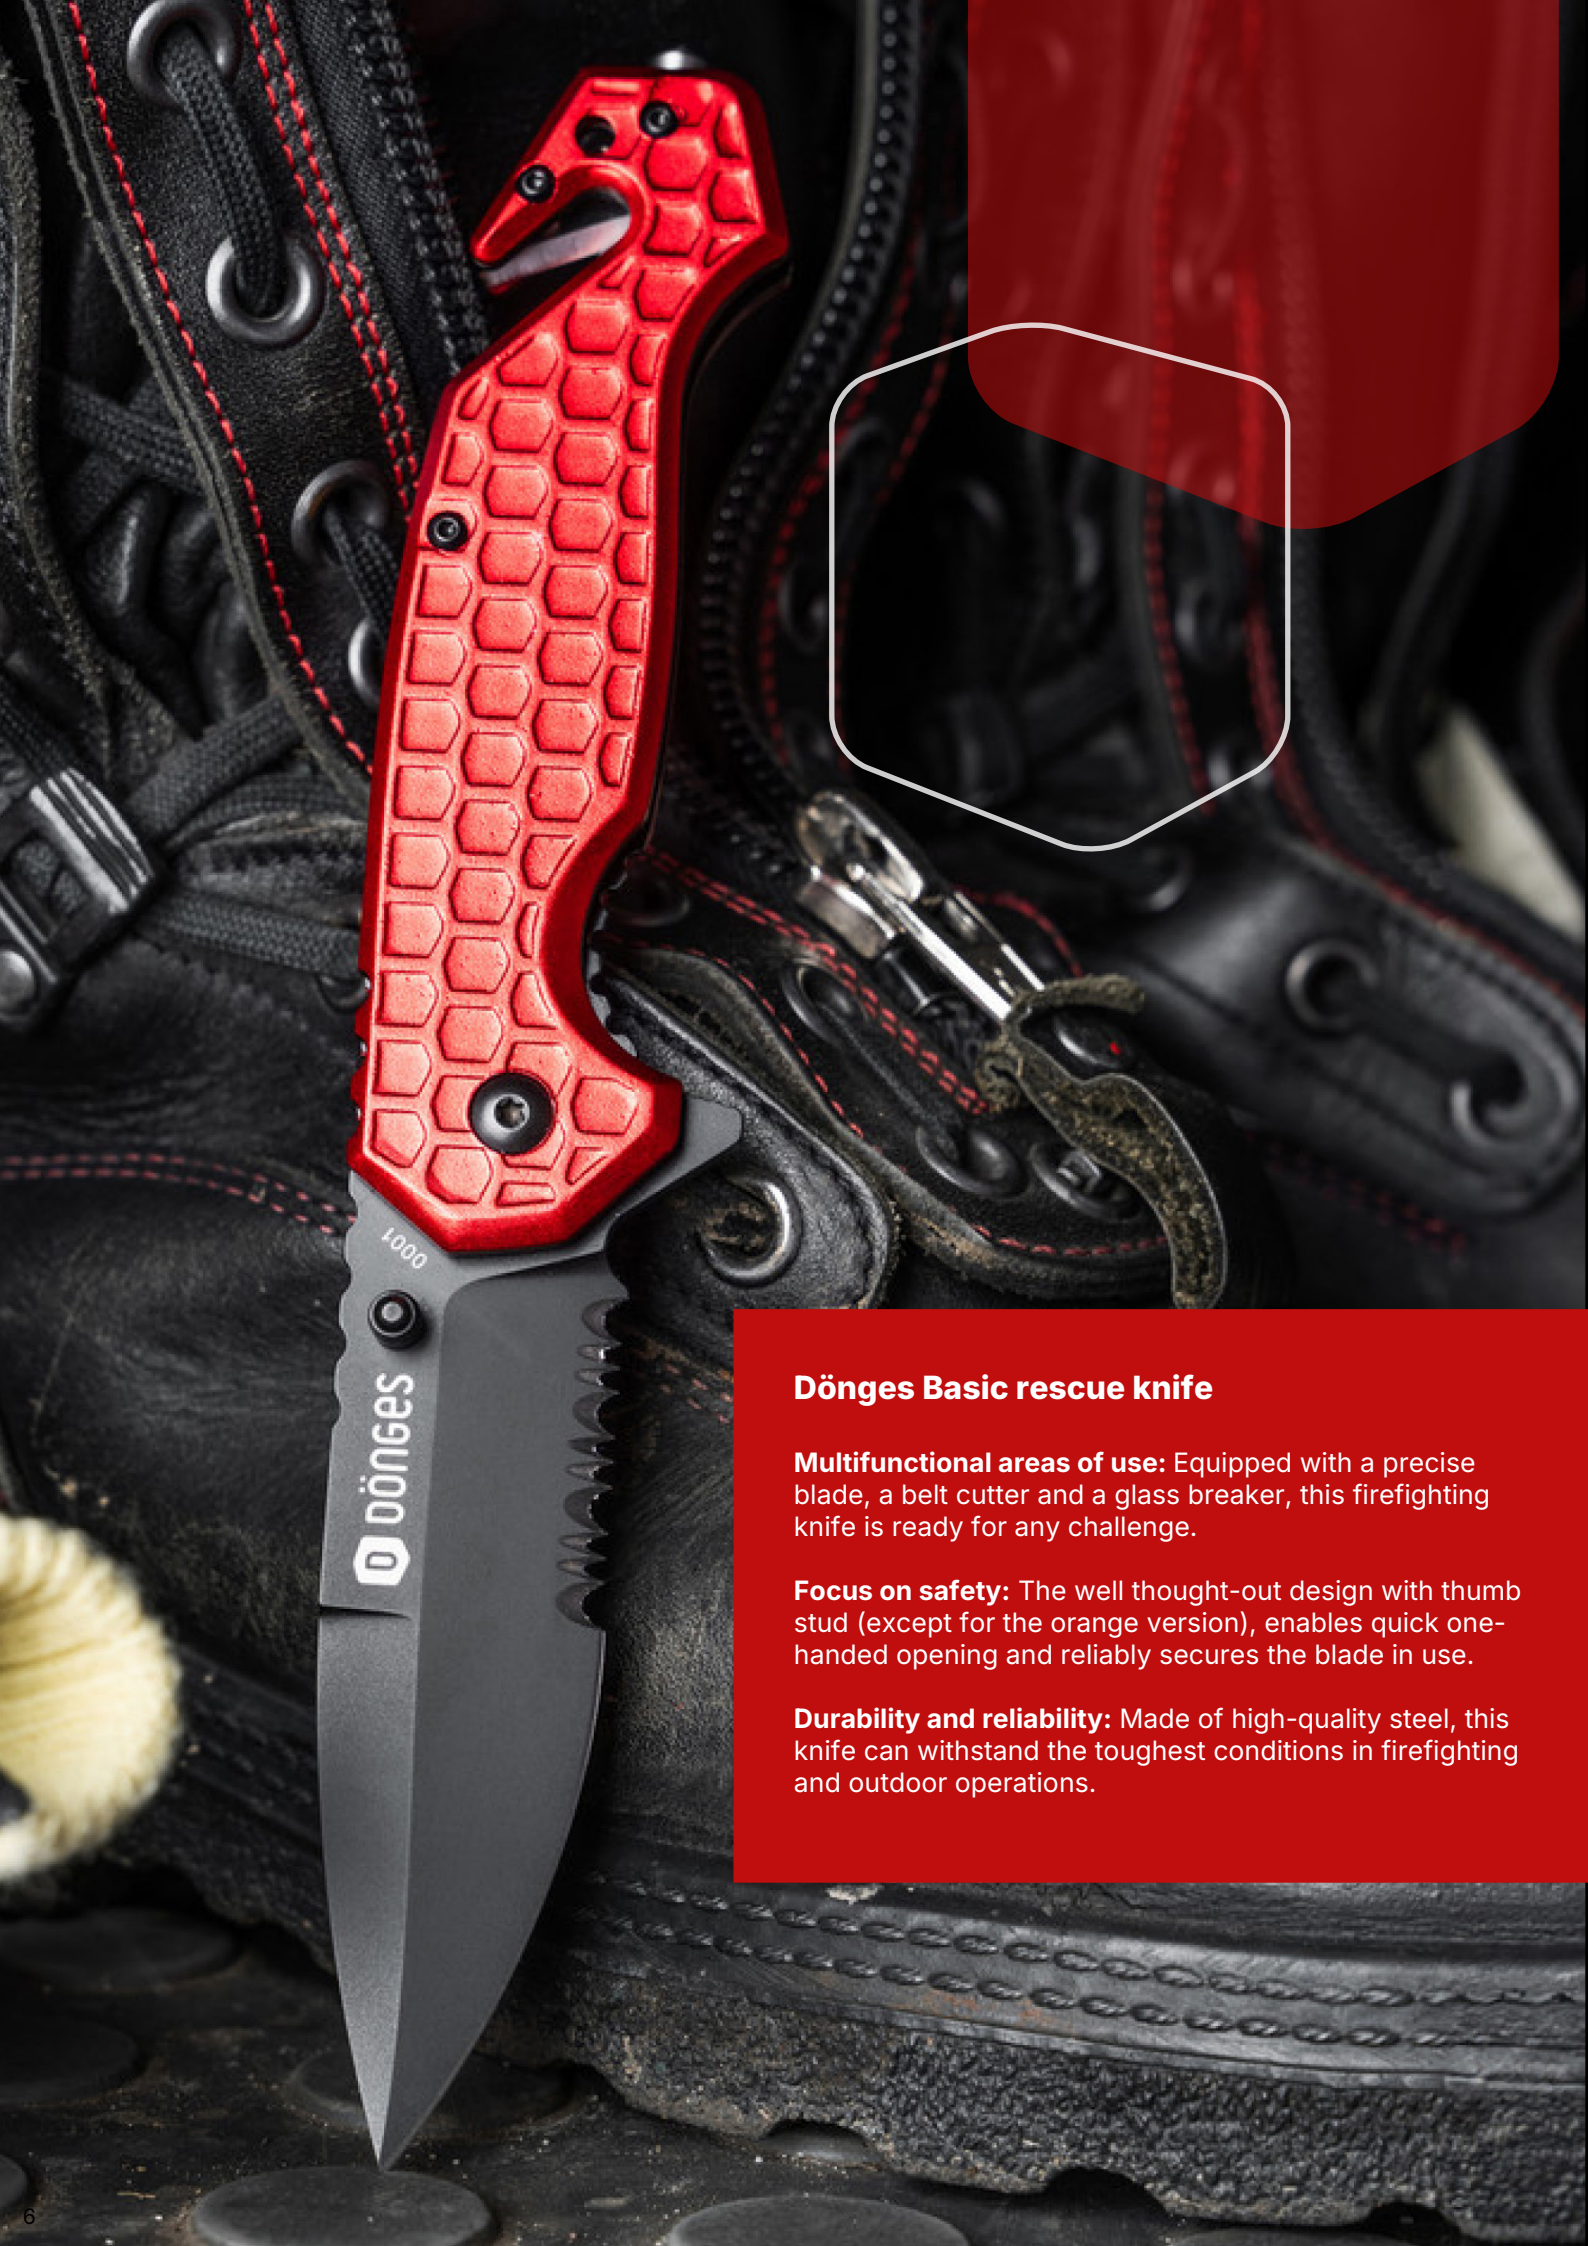

Dönges Basic rescue knife

Multifunctional areas of use: Equipped with a precise blade, a belt cutter and a glass breaker, this firefighting knife is ready for any challenge.

Focus on safety: The well thought-out design with thumb stud (except for the orange version), enables quick one-handed opening and reliably secures the blade in use.

Durability and reliability: Made of high-quality steel, this knife can withstand the toughest conditions in firefighting and outdoor operations.



Technical data:

Blade:	Steel: 440 A
Handle:	Aluminum
Blade length:	85 mm
Handle length:	120,7 mm

Comfortable handle: The ergonomically shaped, non-slip handle guarantees optimum handling under all circumstances.

Practical and portable: Thanks to the compact design and integrated belt clip, the rescue knife is always ready to hand when it matters most.

Unique: The high-quality ball bearing allows the knife to be opened in a flash with minimal effort, which is a unique quality feature of the Basic model.



Ord. no.	Model	Color	Blade shape	Weight g
202132	Fire Fighter	red	Spearpoint	135
202133	Rescue	orange	Sheepfoot	135
202134	Tactical	black	Tanto	135



Dönges Rescue knife Professional

Multifunctional design with special handle: Equipped with a belt cutter and glass breaker for versatile rescue operations, the Dönges Rescue Knife Professional is characterised by a handle made of GRP.

First-class materials and partial serrated edge: The stainless steel blade with partial serrated edge not only offers outstanding cutting performance, but is also extremely resistant to corrosion.

Quick and safe handling: Thanks to the one-handed blade with partial serrated edge and secure locking function, the knife is ready for immediate use.

Designed for professional requirements: This rescue knife has been specially developed for fire brigades, rescue services and emergency teams to meet their specific requirements.

Versatile application options: The extensive features including a glass breaker at the end of the handle and four-way convertible wire clip offer a wide range of attachment and deployment options.



Technical data:

Blade:	Steel: D2
Handle:	Plastic: G10
Blade length:	115 mm
Handle length:	155 mm



Ord. no.	Model	Color	Blade shape	Weight g
202135	Fire Fighter	red	Spearpoint	255
202136	Rescue	orange	Sheepfoot	255
202137	Tactical	black	Tanto	265





Technical data:

Blade:	Steel: D2
Handle:	Plastic: G10
Blade length:	100 mm
Handle length:	135 mm



Dönges Rescue knife Expert Folder, colour: red

Double blades: Offers a spearpoint blade with partial serrated edge for precision cutting tasks and a rescue tool blade with partial serrated edge, belt cutter, nail puller and cap lifter, ideal for rescue operations.

High quality materials: Equipped with a robust D2 steel blade and a durable G10 (GRP) handle, guaranteed for durability and reliability in extreme conditions.

Quick one-handed operation: Ball-bearing blade mechanism enables lightning-fast opening with the finger flipper - ideal for situations where every second counts.

Versatile application options: The extensive features including glass breaker at the end of the handle and four-way convertible wire clip offers a wide range of fastening and application options.

Designed for action: Perfectly suited to the needs of fire-fighters, paramedics and emergency responders, this knife combines efficiency and versatility in critical situations.

Reliable safety: Both blades lock securely with a dirt-resistant linerlock, minimising the risk of unintentional folding and increasing operating safety.

Grip-safe Dönges honeycomb structure: The G10 handle with its special honeycomb structure ensures optimum grip and control, even in wet conditions or when wearing gloves.

Ord. no. Item

Weight g

202138 Dönges Rescue knife Expert Folder, colour red JD212424SD

315



Dönges Rescue knife Expert Fixed, color: red

Specialised rescue tool blade: Features serrated edge and chisel tip for maximum efficiency when cutting fibrous materials and severing webbing.

Multifunctional tool: Whether it's opening jammed fuse boxes or cutting through clothing, the precise blade and integrated belt cutter are ready for any situation.

High-quality G10 handle: Provides optimum grip in all conditions thanks to the non-slip Dönges honeycomb structure.

Safe storage and transport: With the custom-fit Kydex sheath and optional attachment options using a modular clip or cable tie, your knife will always be at hand.

Robust and reliable construction: Thanks to the full-tang construction and parrying elements, including an integrated cap lifter, the knife is not only a rescue tool, but also a companion for breaks.

Made for professionals: Designed for the demanding requirements of fire and rescue services, this knife offers reliability and functionality when it counts.

Technical data:

Blade:	Steel: D2
Handle:	Plastic: G10
Knife sheath:	Plastic: Kydex
Blade length:	95 mm
Handle length:	125 mm

Scope of delivery:

- 1 pieces Rescue knife Expert Fixed
- 1 pieces Knife sheath



Ord. no.	Item	Weight g
202139	Dönges Rescue knife Expert Fixed, color: red JD212424SD	200



Laser
engraving
on the blade
is available



Dönges Economy rescue knife

The Dönges Economy I Rescue Knife is a cost-effective yet reliable tool that has been specially developed for rescue workers and safety-conscious users. It combines all essential functions in a compact design. The lockable stainless steel blade with partial serration enables precise cutting of a wide range of materials. The ergonomic plastic handle with non-slip surface ensures a secure grip, while the thumb stud enables quick one-handed operation. Additional features such as an integrated belt cutter, a glass breaker and a sturdy belt clip make this knife an indispensable companion in emergency situations. Despite its extensive features, the knife remains compact and lightweight, making it ideal for everyday use.

Features:

- **Blade with partial serrated edge:** Ideal for precise cutting of ropes, belts and other materials
- **One-handed opening with thumb pin:** quick and safe opening, even under difficult conditions
- **Integrated seat belt cutter:** efficient cutting of seat belts in emergencies
- **Glass breaker:** Enables window panes to be smashed during rescue operations
- **Ergonomic handle:** non-slip surface for a secure grip and comfortable handling
- **Sturdy belt clip:** Secure attachment to the belt for quick access
- **Compact design:** With 125 mm (closed) and 210 mm (open) handy and easy to transport



Ord. no.	Blade shape	Color	Weight g
212439	Standard	red/silver	170



Dönges Universal knife holster

Stable knife holster made from nylon fabric with 100 mm wide belt loop to secure on to a firefighter belt or to attach vertically as shoulder strap of breathing apparatus with optionally available adapters. Suitable for all PRT knives, Rescue Tool I, rescue knife and other appropriately sized knives.



Ord. no.	Dimension L x W x H mm	Weight g
212427	160 × 45 × 35	240



Dönges RN-2 rescue knife

Patented rescue knife from the USA for fire brigade, police and rescue services. Extremely sturdy metal structure.

Two replaceable blades are securely anchored in the "V". The rounded edges prevent injuries to the rescued victim. The heavy head can even smash thick panes of glass. The shape of the handle prevents the device from falling out of your hand.

The special DZUS connection makes it possible to open aircraft and vehicle doors.

Ord. no.	Color	Length mm	Weight g
212477	red	240	480



Dönges Automatic grains

Hardened, self-hammering special spring center punch for opening side or rear windows. One-handed operation: just put it on and press!

The device can be stored in the handle of the original Glas-Master or used as a stand-alone tool.



Ord. no.	Length mm	Weight g
211314	130	70

UK Headlamp 3AAA LED VIZION [i] ATEX

The VIZION with ATEX approval. The perfect headlamp for the professional user. Light output, lighting duration and all features of the UK 3AAA VIZION can also be found in this explosion-proof variant. In order to secure the lamp to a helmet easily and securely, the lamp is equipped with a head band made from special rubber. The rubber ensures that the head band cannot slip off a smooth surface such as helmets, but remains firmly anchored.



Features:

- White high power LED
- Rubberized on/off switch
- 100% waterproof and dustproof
- Three modes (spot, diffuse, red light) through rotatable filter
- Two luminous intensities adjustable: 35 and 65 lumens
- Up to 17 hours of constant brightness due to the special electronics
- Complies with CENELEC (CE) requirements

Technical data:

Waterproof until:	10 m
Explosion protection:	ATEX
Zone 1:	II 2G Ex ib IIC T4 / II 2D Ex ibD 21 T55°C
Batteries:	3 x AAA
Brightness:	35/65 lm
Burning time:	7-24 h

Ord. no.	Color	Dimension L x W x H mm	Weight g
219561	black	76 x 38 x 45	110
219569	neon yellow	76 x 38 x 45	155

Scope of delivery:

- 1 pieces UK 3AAA Vizion [i] ATEX
- 1 pieces Rubber headband
- 3 pieces AAA battery



Dönges Multifunctional COB LED light Mini

Whether for night-time rescue operations, clearing up accident scenes or working in extreme conditions - this multifunctional, portable mini torch made of robust aluminium is specially designed to meet the requirements of firefighters and emergency services. With an impressive light intensity of 800 lumens and versatile functions such as a magnet, carabiner and bottle opener, it is the perfect companion in any situation.

Technical data:

Color:	black
Material:	Aluminum
Light intensity:	500 lm
Loading time:	1,5 h
LED:	1 × 5W COB LED



Ord. no.	Dimension L x W x H mm	Weight g
202654	70 × 45 × 20	55


Scope of delivery:

- 1 pieces COB LED light
- 1 pieces USB-C charging cable

Features:

- Mini flashlight made from robust aluminum
- 500 lumens for optimum brightness
- Three light modes: strong, weak and flashing
- Integrated magnet for hands-free use
- Carabiner for attaching to jackets or equipment



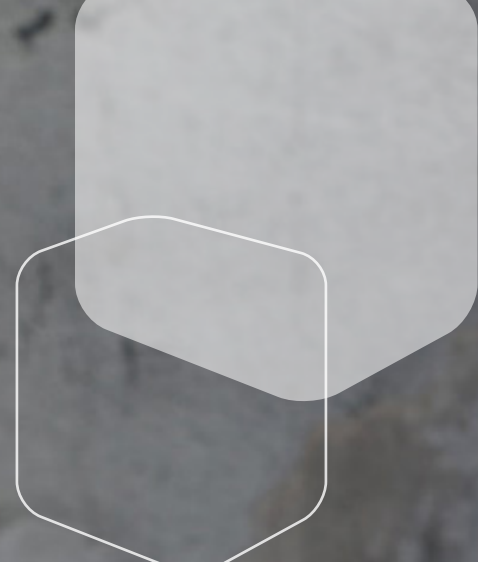

Dönges Hand lamp HL 4AA WK ATEX

The HL 4AA WK is a portable, intrinsically safe torch for use in potentially explosive atmospheres. The lamp is powered by four AA alkaline batteries. It has two light levels (Hi/Low/Off) which are switched by the push-button. This gives you optimum brightness and a long lighting duration.

Features:

- Metal clip for attachment to breast pocket, belt, etc.
- Two different brightness settings
- Battery compartment screwed
- Highly efficient heat sink for long LED lifetime
- Large, rubberized pressure switch (Hi/Low/Off)



Technical data:

Protection class:	IP54
Illuminant:	LED (Cree XP-2G)
Explosion protection:	ATEX
Zone 0:	II 1G Ex ia IIC T4 Ga
Batteries:	4 x AA
Brightness (Hi/Low):	323/140 lm
Burn time (Hi/Low):	6,5/13 h
Illumination range:	290/190 m

Ord. no.	Luminaire dimensions L x W x H mm	Weight g
201127	55 × 65 × 186	344

Scope of delivery:

1 pieces Hand lamp
4 pieces AA battery



Dönges Wildfire Gloves Wildland Fire

The Wildland Fire Glove has been specially designed for the challenging work in wildland fires and offers first-class protection without restricting comfort or mobility. With its high breathability and tactility, this glove is ideal for long operations. Careful material selection and construction ensures protection against heat, flames and mechanical impact. The innovative three-layer effiSHELL® coating was developed exclusively for wildland fire gloves and offers a unique combination of water resistance, improved flammability and high wearing comfort.

Features:

- Mechanical resistance and heat protection
- Three-layered on the back of the hand, thermostable goatskin on the back of the hand
- Ergonomic fit with great freedom of movement
- Flame-retardant and water-repellent, ideal for long periods of use
- Pull strap for easy on and off removal and quick drying
- Washable at 40°C



Technical data:

Standards: EN388:2016:3443C | EN 407:4121 | ISO 16073-4

Ord. no.	Size	Hand palm width	Weight g
202665	10 (XL)	24,2 - 26,7	144
202666	11 (2XL)	26,7 - 29,2	150
202667	12 (3XL)	29,2 - 30,4	156
202668	13 (4XL)	30,4 - 32,9	162
202664	6 (XS)	15,2 - 16,5	120
202669	7 (S)	16,5 - 19	126
202670	8 (M)	19 - 21,6	132
202671	9 (L)	21,6 - 24,2	138





Dönges Cleaning wipe Dekon Rag

Practical and very effective cleaning wipe for hand and surface cleaning. Removes even the most stubborn dirt quickly, efficiently and gently.

Suitable for greases, oils, adhesives, tar, wax, soot, paint, ink, sealants, polyurethane (PU) and much more.

After hand cleaning the wipes have enough cleaning power to clean tools and equipment. The wipe is soaked with a cleaning fluid, is especially tear-resistant and has a nubbed side for heavy dirt and a smooth side for gentle hand cleaning.

The particularly good cleaning effect is achieved by the combination of the special cloth surface and the cleaner.

Tested quality with NSF approval. Individually packed, airtightly sealed, can be used at any time without water. Cleaning fluid with refatting ingredients to protect your skin.

Features:

- Soaked wipe, single packed
- Cleans quickly, efficiently and gently without water
- The cleaning solution has an antibacterial, refatting and quick-drying effect
- Easy removal
- Large sized wipe
- Highly tear-resistant
- NSF certified



Technical data:

Color:	grey
Fragrance:	Orange
Wipe size:	27 × 31 cm
Sachet size:	12 × 8,4 × 0,5 cm
pH value:	7,8

Ord. no.	Scope of delivery	Piece	Weight g
201525	1		18
201528	50		900
201527	100		1800



Dönges Fire department rope (trap line) DIN 14920

Made from top quality polyester, with spiral plaiting,
Ø 10 mm

Type F xx-H:

Wooden toggle at one end, Ø 90 mm eye splice at the other end.

Type F xx-K:

A10 cable eye stiffener and karabiner hook at one end, Ø 90 mm eye splice at the other end.



Ord. no.	Type	Variant	Length m	Weight g
212610	F 20-H	Wood gag	20	1460
212620	F 20-K	Carabiner	20	1600
212615	F 30-H	Wood gag	30	2060
212625	F 30-K	Carabiner	30	2455



Dönges Linen bag for SCBA

This linen bag with leakage protection can be attached to almost all respiratory protective devices without any problems. The height-adjustable hook is adapted to the length of the bottle and attached to the neck of the bottle with a rubber grip. The self release handle allows the wearer of the breathing apparatus to free himself from the linen bag in an emergency without any help. The way back is secured and the hands remain free.

Features:

- Suitable for lines up to 30 meters

Ord. no.	Dimension H x W x D cm	Weight g
290016	40 × 14 × 14	400



Dönges waterproof Dry-bag Seal-D

Our products from the Seal-D series are the ideal companion for a variety of leisure activities. Made of 100% waterproof and ultra-rugged PVC material, the contents are safely protected from dust and water.

All seams are waterproof welded and special splash-proof zippers are used to ensure the tightness.

The closure:

To close the Seal-D bag and backpack waterproof, simply turn the closure 3-4 times and then secure it with the nylon buckle.

The travel bag can be closed splash-proof with the zipper. The flap covers the zipper for extra protection against splash water.

Tip: Before closing, compress the contents by applying light pressure from outside, unnecessary air escapes and the bag takes up less space.

The perfect companion:

The Seal-D products are tough! Robust rip-stop material and hard-wearing seams ensure a long life.

They are not only your companion for the next outdoor-, camping- or boat-tour, whenever things have to be stored safely and securely, our bags are the first choice.

Ord. no.	Color	Usable volume l	Weight g
201385	Red 15L	15	470
201388	Red 24 L	24	690



Technical data:

Dimension Ø x H:	23 × 56,5 cm
Usable interior height:	36 cm
Material:	PVC/Nylon



Technical data:

Dimension Ø x H:	27 × 69 cm
Usable interior height:	42 cm
Material:	PVC/Nylon

Features:

For real heroes: The Dry Bags are not only reliable, but also specially developed for the needs of firefighters. They offer unwavering protection and are built to last for years.

The fastener: To close the Seal-D bag and the backpack watertight, the fastener is simply folded over 3-4 times and then secured with the nylon buckle.

The perfect companion: the Dry Bag is tough! Robust rip-stop material and hard-wearing seams ensure a long service life.



All-rounder: The pack sack is not only your companion on your next outdoor, camping or boat tour, our bags are the first choice whenever things need to be stowed safely and securely.

Specifications: Attached pocket on the front | Ergonomic carrying handle





Dönges waterproof Travel bag Seal-D

Our products from the Seal-D series are the ideal companion for a variety of leisure activities. Made of 100% waterproof and ultra-rugged PVC material, the contents are safely protected from dust and water. All seams are waterproof welded and special splash-proof zippers are used to ensure the tightness.

The closure:

To close the Seal-D bag and backpack waterproof, simply turn the closure 3-4 times and then secure it with the nylon buckle.

The travel bag can be closed splash-proof with the zipper. The flap covers the zipper for extra protection against splash water.

Tip: Before closing, compress the contents by applying light pressure from outside, unnecessary air escapes and the bag takes up less space.

The perfect companion:

The Seal-D products are tough! Robust rip-stop material and hard-wearing seams ensure a long life. They are not only your companion for the next outdoor-, camping- or boat-tour, whenever things have to be stored safely and securely, our bags are the first choice.

Features:

- All seams welded waterproof
- Zipper in splash-proof design
- Easy filling thanks to large opening
- The zipper closes the contents splash-proof
- Pocket for small parts inside on the opening flap
- Padded, removable backpack straps
- Ergonomic carrying handle and additional carrying handles on the sides
- Base reinforced with nylon fabric on the outside



Technical data:

Dimension Ø x W:
Material:

34 × 66 cm
PVC/Nylon

Ord. no.	Color	Usable volume l	Weight g
201391	red	60	1460

Dönges Kitchen cleaver

Kitchen hatchet with ash handle. Quality hatches for all types of use.

Features:

- With ash cow foot handle
- For all types of applications



Ord. no.	Length cm	Weight approx. g	Weight g
280440	36	600	600
102462	38	800	1020
101383	40	1.000	1000

Dönges Fire Axe with fiberglass handle

These axes, which are particularly widespread in the USA and other English-speaking countries, are popular because of their tremendous sturdiness. The NUPLA handle is almost unbreakable because of its special design and high proportion of fibreglass.

Whereas the American design firefighter axe is used in a similar way to the German firefighter axe, the Pulaski axe is mainly used for wildland fires. The blade of the axe is used for cutting off hanging branches or fallen small trees, and the hoe can be used to create a fire break in any kind of ground.

Features:


- Handle almost indestructible
- High quality forged axe head
- Good electrical insulation
- Very good price-performance ratio

Ord. no.	Model	Weight g
210480	American form	4100
210481	Pulaski form	3000



Technical data:
Length:

90 cm

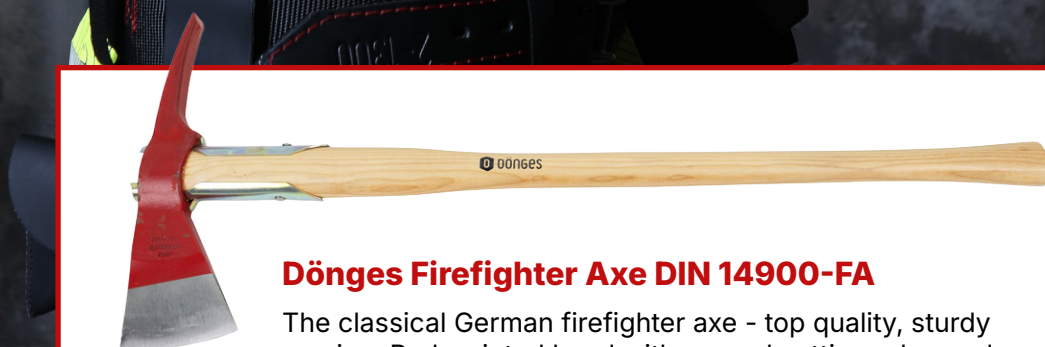

Dönges Firefighter Axe DIN 14900-FA

The classical German firefighter axe - top quality, sturdy version. Red-painted head with ground cutting edge and lever cutter at other end.

With oval hickory handle with transparent varnish. The axe head is secured with two springs, one rivet and two ring wedges.

Ord. no. Abmessung B x H mm

Weight g

201001 340 × 900

2560

Dönges firefighter axe with fibreglass handle

The axe head is the same as the fire axe according to DIN 14900, but this axe is equipped with a fibreglass handle. This means very great stability at a good price-performance ratio. The handle piece of the handle is rubberized for better grip.

Features:

- Similar to DIN 14900
- Sturdy and inexpensive fibreglass handle
- High quality forged axe head
- Good electrical insulation
- Non-slip rubberized handle

Ord. no. Length mm

201009 900

Weight g

2620

Dönges firefighter axe with NUPLA handle

The special manufacturing procedure and the extremely high proportion of fibreglass makes this handle almost unbreakable. A rubber handle at the end provides the necessary grip.

Features:

- Similar to DIN 14900
- Handle almost indestructible
- High quality forged axe head
- Good electrical insulation
- Very good price-performance ratio

Ord. no. Length mm

201007 900

Weight g

3140

Dönges firefighter axe FireAXEss

The FireAXEss was specially developed to use in fire brigades. The axe is equipped with a 3 kg hardened steel axe head and a robust fibreglass handle. Due to the special cutting edge geometry, the axe achieves a higher performance than a conventional wooden axe with the same amount of force.

The head also features a flattened side, which can be used as a sledgehammer or for driving in other tools. Special notches allow the quick combination of a hooligan tool with additional hook and loop straps for easy transport. A riser system is also available for this combination.

Technical data:

Material of axe handle: fibreglass
Material of axe head: CF53 steel



Features:

- Higher impact with less effort
- Special cutting edge geometry
- Sturdy handle made of resilient fibreglass
- Axe head with receptacle for a hooligan tool
- Hardened steel for long life
- Perfect in combination with the proven Hooligan tools



Ord. no. Dimension L x W x H mm

211623 925 x 300 x 90

Weight g

4400

Paratech Hooligan tool

The globally known multifunction Hooligan-tool. For breaking doors, windows etc..

Can be used as a crowbar and pinching bar to spread and rip open.

Made from hardened steel with chemically nickel-plated finish and corrugated handles (25 mm Ø).





Features:

- In use worldwide by fire departments and aid organizations
- Multifunctional, a tool for many purposes
- Heads and claws are forged from high-alloy steel and heat-treated for strength
- The centre bar is a machine-grooved, 1" (2.5 cm) non-slip, heavy-duty steel bar
- Pike is long, sharp, tapered and gently curved to fit into a lock or latch
- Duckbill is long with a gentle slope to force open windows and doors
- The standard claw version has machine-sharpened claws, a recessed nail/spike puller and parallel openings that are sized to fit into gas shut-off valves
- The Metal Cutting Claw variant has a machine-sharpened metal cutting edge that was developed for cutting thick metal and composite materials
- Lightweight version with central, machine-grooved, 1" (2.5 cm) non-slip aluminium handle strip
- Chemical nickel plating with high phosphorus content for high hardness, wear resistance and corrosion protection



Ord. no.	Length mm	Model	Weight g
211520	762	with lever claw	4800
211521	914	with lever claw	5420
211522	1.067	with lever claw	6000
211525	762	with sheet metal cutting claw	5000
211526	914	with sheet metal cutting claw	6000
211527	1.067	with sheet metal cutting claw	6200



Dönges Hooligan-tool combination

The extremely versatile Hooligan-tool gains even more penetration force in conjunction with other supporting tools. This makes the first attack way faster and easier, since the lever blade can be forced into the gap of a heavy door with, for example, the splitting maul. A special carrying strap to combine the Hooligan-tool with a splitting maul, a TNT tool or a TopCut FireAxe, has been developed and makes carrying the tool more comfortable. Many useful combinations can be put together.

The new model of 2017 offers various adjusting possibilities and secures the tools in the system: even if you bump into something, nothing will fall out. Both buckles with 45 and 33 mm width can be easily opened with gloves.

Features:

- More application possibilities by combining two tools
- Increased penetrating power
- Easy transport due to special carrying strap
- Indestructible materials for long durability

Scope of delivery:

depending on the version:

- 1 pieces Support system
- 1 pieces Hooligan tool Paratech, 762 mm, lever claw

as well as either:

- 1 pieces Splitting hammer with fiberglass handle or
- 1 pieces axe FireAXEss or
- 1 pieces TNT Tool



Ord. no.	Type	Weight g
211531	Hooligan Tool/Splitting Hammer	9540
211533	Hooligan Tool/TNT Tool	11640
211624	Hooligan Tool/FireAXEss	9900

Paratech SPF Hooligan-tool

The original design of the Hooligan-tool with lever claw. Manufactured according to FDNY specifications for their primary crushing tool.

This Hooligan-tool is forged from a single piece of steel and its manufacturing process gives it even greater strength and stability than the already indestructible standard Hooligan-tools from Paratech.



Features:

- One-piece die forging for absolutely consistent length
- Countersunk claw of the nail puller type, a thin curved profile
- Cable groove on the back of the tool head
- Non-current nickel plating with high phosphorus level
- Parallel opening for gas valve shut-offs, locks and hasps
- Thinnest claw on the market for better wedging
- Curved beak is long with a gentle incline to overcome windows and doors
- Long, sharp, tapered and gently curved pike to break a lock or bolt



Ord. no. Length mm

211534 762

Weight g

4900

Dönges TNT Tool

The TNT-tool replaces conventional tools such as axes, crowbars, tearing hooks, rams, mortise chisels and sledge hammers. The extremely strong quality steel with black powder coating and the NUPLA fibreglass handle give this tool tremendous stability. The ergonomic handle makes it easy to take advantage of the many different uses of this tool. Easy to carry, easy to use!

Features:

- Opening doors and windows
- Punching holes
- Tearing down walls and ceilings
- Knocking off bolts
- Driving pegs, posts, etc.



Ord. no.	Length mm	Weight g
211524	1.020	13120

Paratech pry axe

Strong multipurpose tool for many different tasks. Can be used as an axe, sheet metal ripper, doors and lock breaker etc. Throwing the locking lever unlocks the extension handle, which can be fully or partially extended. Manufactured from hardened steel with chemically nickel-plated finish.

Two different versions are available, with levering claw or metal cutting claw.

Ord. no.	Model	Length closed/extended mm	Weight g
202063	Lever claw	470/655	3000
202065	Metal cutting claw	475/660	3000



Features:

- Axe edge
- Nail puller
- Lever claw or metal cutting claw
- Impact tip

Scope of delivery:

- 1 pieces Pulling device original bell
- 1 pieces Core pull plate profile cylinder
- 1 pieces Core Pulling Plates Round Cylinder
- 1 pieces WD-40 cutting oil 200 ml
- 1 pieces Graphite lubricant for lag screws
- 150-pack Draw screw Original Draw-Fix "Extra"
- 150-pack Pulling screw Original Pulling Fix "Super"
- 150-pack Draw screw Original Draw-Fix "Special"
- 1 pieces Proxxon speeder ratchet SW 17 × 19
- 1 pieces Bit holder with cross handle
- 1 set Bit set in box 10 pieces
- 3 pieces Torx bit TX-20 for lag screws
- 1 pieces Needle nose pliers
- 1 pieces Metal profile cylinder closer
- 1 pieces Instruction manual
- 1 pieces Case with foam insert



Dönges original "Bell" lock picking-tools

The lock puller is becoming increasingly popular in the fire brigade and rescue service area as a tool for opening doors. This is because it is safe and easy to use: the pulling force is applied to the pulling screw axially. This reduces the risk of breaking off considerably. Also, there is only one screw to tighten. Troublesome switching between two lifting screws is not required.

The original Bell, made in Germany, is extremely robust. A quality tool for continuous heavy use. Everything that you need for quick, problem-free and tidy pulling of the lock cylinder is accommodated in a sturdy case (dimensions 380 × 290 × 100) with foam rubber insert made from industrial Plastazote.



Ord. no. Dimension L x W x H mm

Weight g

216000 380 × 290 × 100

4160

Dönges ceiling hook DIN 14851

The completely re-designed pike hook in accordance with DIN 14851 is now lighter and can be better stowed away in the vehicle. The total length of the pike hook with telescopic handle is 2 meters. It can be extended to a maximum length of 3,20 metres. The total length can be extended to a maximum of 4,80 metres with the optional extension.



The handle of the hook part is continuously telescopic -an invaluable advantage. Connection of the hook part via spigot similar to DIN 14640.

At the end of 2014, the standard was revised again and the safety of the rescue services in dealing with this tool was increased. The telescopic handle is now braked and cannot retract or extend by itself after loosening the fixation. End caps have been added to prevent dirt from entering the system and a protective bag for the hook part is now included.



Features:

- The pull-in hooks (both telescopic tube and the hook itself) withstand a tractive force of 2.5 kN in the longitudinal direction
- All connections are locked and secured with captive screws that can be operated without tools
- Telescopic handle with non-slip grip and cold protection
- With brake in the telescopic handle, hook cannot retract and extend by itself

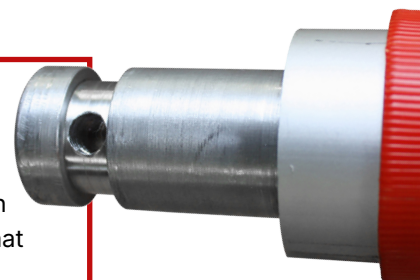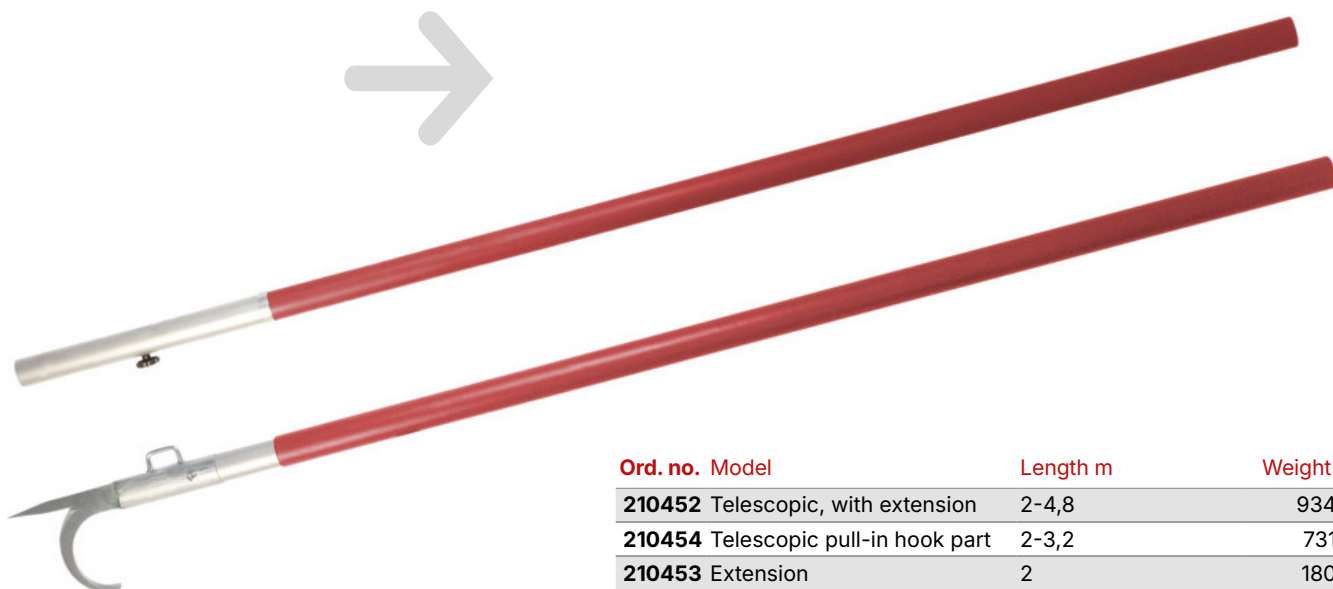

Ord. no.	Model	Length m	Weight g
210452	Telescopic, with extension	2-4,8	9340
210454	Telescopic pull-in hook part	2-3,2	7310
210453	Extension	2	1800

Dönges ceiling hook with NUPLA fibreglass handle

The specially shaped ceiling hook with NUPLA handle are similar to the German ceiling hook but have significant benefits during use. They are considerably lighter yet sturdy and resistant to moisture and wetness as well as temperature fluctuations. The NUPLA handle also insulates extremely well. These properties have made it a standard for the fire brigades in the USA. The ceiling hooks are available with a straight handle.


Ord. no.	Handle type	Length cm	Diameter Ø mm	Weight g
210441	straight	183	30	2700
210444	straight	244	30	3000
210442	D-handle	183	30	3000
210446	D-handle	244	30	3500



Inteletool Glass fiber handle telescopic


The telescopic handles with an interchangeable system offer the user a maximum of flexibility. The handles can be stowed away to save space and can be pulled out to the correct length as required. Thanks to the numerous tool heads, an entire range of tools can be stored in a minimum of space so as to be prepared for any eventuality.

Safety is also not neglected with this system. Fibreglass-reinforced plastic offers a high degree of safety against electrical and thermal hazards. The telescopic function works with a double safety system. The handle can be locked in any length with a quarter turn (Twist-Lock). In addition, the handle is secured with the retaining ring.

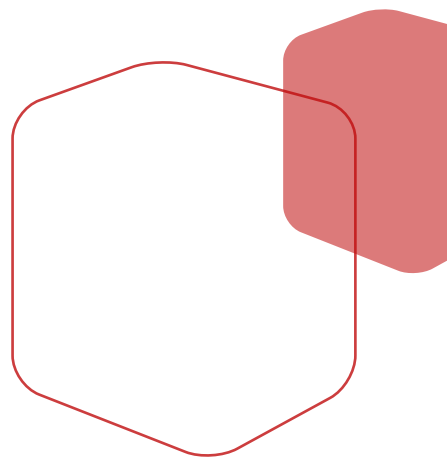


Features:

- Durable and robust material
- Double security thanks to twist-lock and screw lock
- Continuously adjustable length
- Easy change of tool heads possible
- Insulated against cold and electrical voltage
- Handle end with rubber coating for more grip

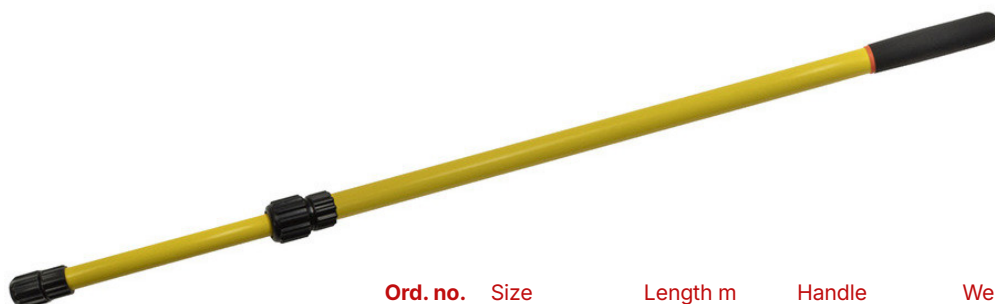

Ord. no.	Size	Length m	Handle	Weight g
200859	S	0,75 - 1,25	straight	1030
200860	M	1,35 - 2,35	straight	1590
200861	L	2,45 - 4,60	straight	2950

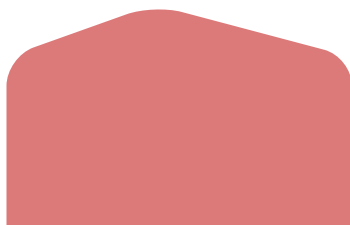

Inteletool telescopic fibreglass handle with tool head

The telescopic handles with an interchangeable system offer the user maximum flexibility. The handles can be stored to save space and extended to the correct length as required during use.

Thanks to the wide range of tool heads, an entire range of tools can be stored in the smallest of spaces, ensuring you are prepared for any situation.

Safety is not neglected in this system either. Glass-fibre-reinforced plastic generally offers a high level of protection against electrical and thermal hazards. The telescopic function operates with a dual safety system. The handle can be locked at any length with a quarter turn (twist-lock). Additionally, the handle is secured with a locking ring.


Handle sizes at a glance:

M = 135 - 235 cm

L = 245 - 460 cm

Features:

- Durable and robust
- Double security thanks to twist-lock and screw lock
- Continuously adjustable length
- Easy change of tool heads possible
- Handle insulated against cold and electrical voltage (not certified)

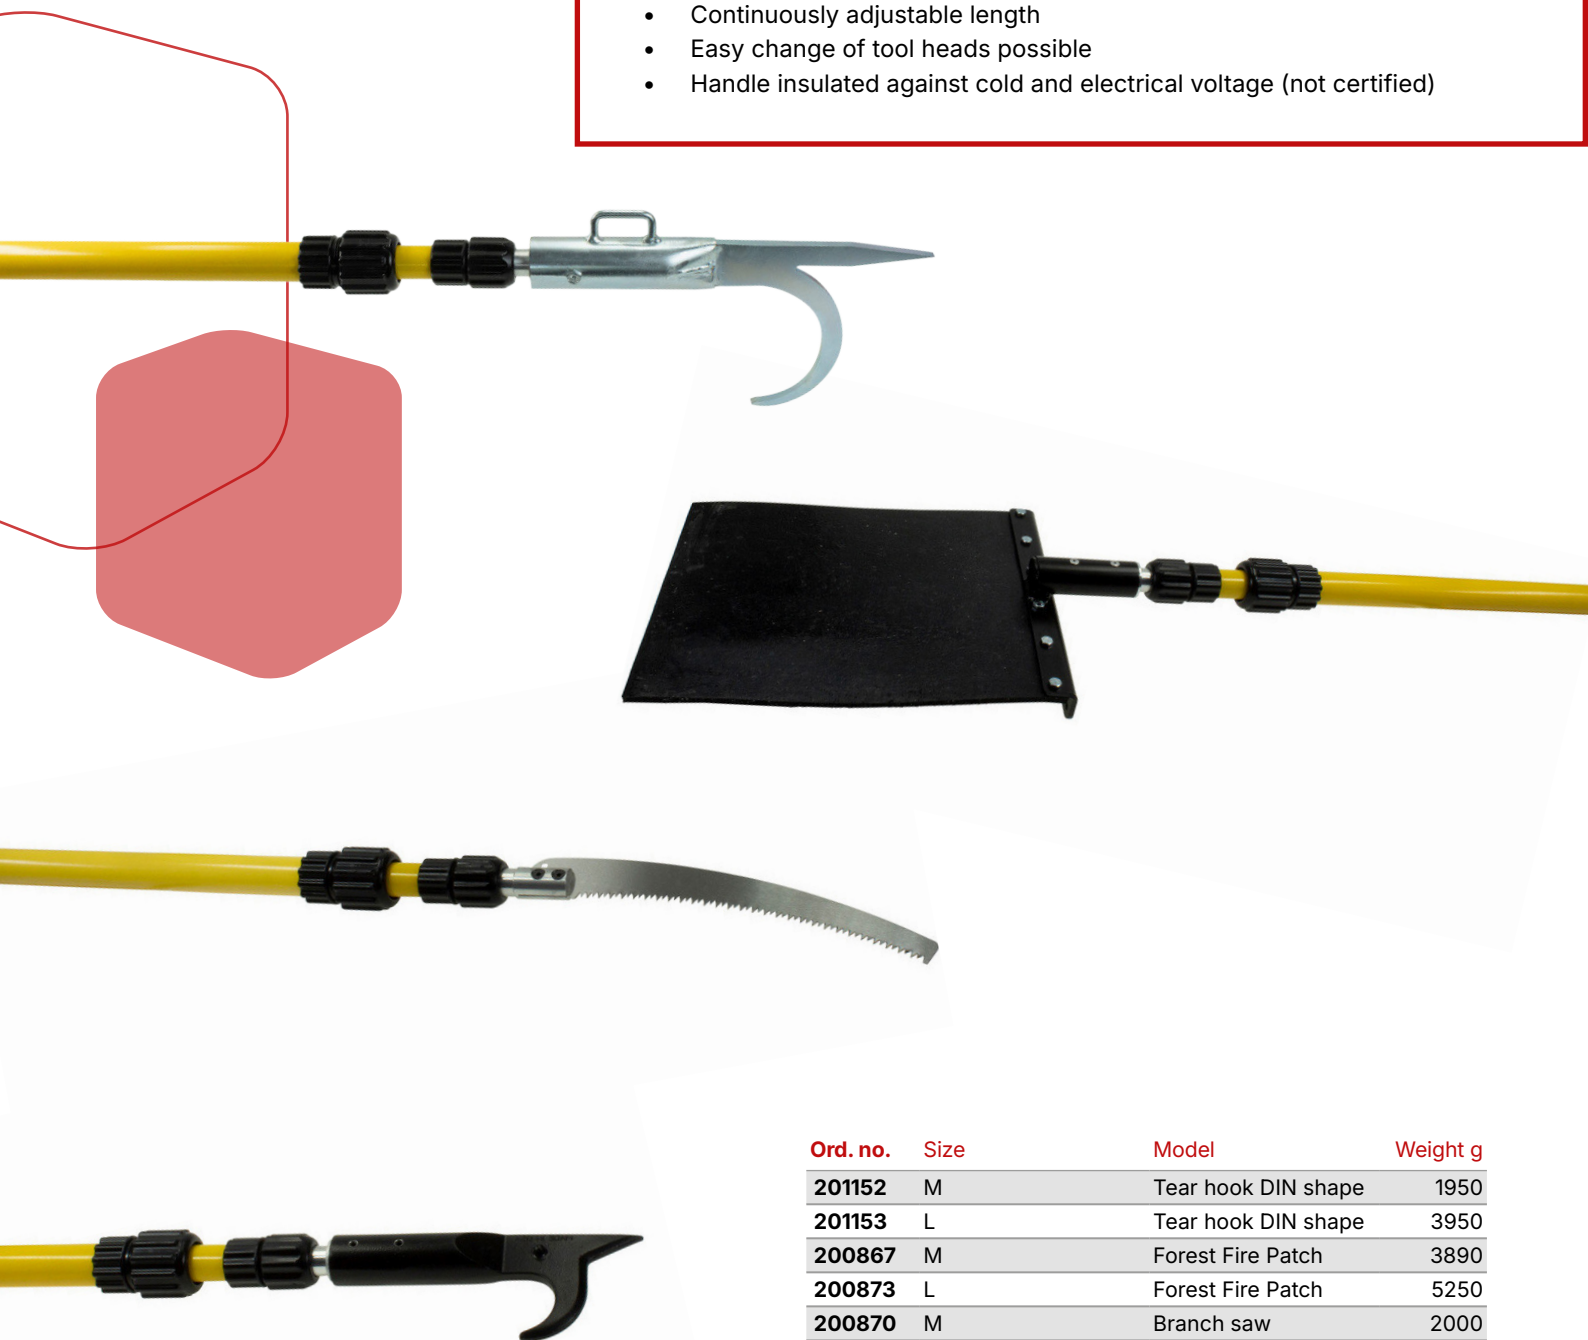

Ord. no.	Size	Model	Weight g
201152	M	Tear hook DIN shape	1950
201153	L	Tear hook DIN shape	3950
200867	M	Forest Fire Patch	3890
200873	L	Forest Fire Patch	5250
200870	M	Branch saw	2000
200876	L	Branch saw	3360
200871	M	Tear hook US shape	2375
200877	L	Tear hook US shape	3735





Dönges FireBox according to DIN 14880-1

This aluminium box is a robust, versatile solution, specially developed for the fire service. Thanks to its compliance with DIN 14880:2013-12, the Firebox® offers optimal logistical features. It is stackable to Euro-pallet dimensions, extremely sturdy yet lightweight – for example, it reduces the weight of the DIN 14881 fire service tool kit by around 7 kg. The box is dust- and splash-proof to IP 44, rust-free and durable thanks to a high-strength aluminium alloy. Large, ergonomic handles make it easy to carry. Various interior fittings are available on request, and the box is lockable and sealable for added security.



Ord. no.	Dimension L x W x H mm	Size	Weight g
202443	400 × 300 × 220	2	3260
202445	400 × 300 × 150	4	2900

Features:

- Stainless steel hinge, fixed with solid rivets
- Stainless steel fasteners with strong stainless steel shackle and stable full rivet joint
- Ergonomic, plastic-coated spring drop handles can be operated perfectly even with thick gloves
- Fastening the handles with solid rivets
- Two heavy-duty webbing straps fastened with solid rivets
- Sheet thickness 1.35 mm for cover and walls
- Complies with DIN 14880:2013-12
- Locks with additional spring-open protection

Dönges FireBox

Dönges collaborates in the fire brigade and rescue area, establishing a modern storage concept that is compliant with DIN 14880:2007-06 in the market.

Advantages of the Firebox:

Stackable in Euro pallet dimensions, the special centring frame in the lid means that small crates can be safely stacked on the bigger versions.

Extremely sturdy, quality that has been tried and tested millions of times from market.

Extremely light, e.g. the DIN 14881 firefighter tool-kit weighs about 7 kg less in this crate. Protected from dust and water spray in acc. with IP 44.

Non-rusting and long-lasting because of extremely strong aluminium alloy.

Easy to carry because of large ergonomic handles.

Different internal equipment, foam rubber inserts, small parts boxes etc. available on request. Both fixed dividers and flexible systems are possible. Lockable/sealable with padlock.





Features:

- Welded profile frame joints for increased stability
- The internal dimensions are not reduced by the upper edge profile
- PU foam gasket permanently foamed onto the cover plate
- Corner beads for even more stability
- Rust-free stainless steel hinge strip, fastened with solid rivets
- Rust-free stainless steel latches with strong stainless steel loop and stable solid rivet connection
- Ergonomic, plastic-coated spring-loaded handles, easy to use even with thick gloves
- Fastening the handles with solid rivets
- Two high-strength straps, fastened with solid rivets
- Sheet thickness 1.35 mm for cover and walls
- Complies with DIN 14880:2013-12

Ord. no.	Dimension LxWxH mm	Size	Weight g
214025	600 × 265 × 220	5	4600



Dönges FireBox transport basket DIN 14880

Aluminium basket, empty, without cover and without internal partitioning, perforated side walls for better ventilation of the stored objects. Particularly suitable for storing damp or wet equipment after operations.

All of the advantages of the FireBoxes also apply to this lightweight type of transport box for storing in the vehicle.



Ord. no.	Dimension L x W x H mm	Size	Weight g
214103	600 × 400 × 220	1	4000
214104	400 × 300 × 220	2	1900
214105	600 × 400 × 150	3	3100
214106	400 × 300 × 150	4	1300
214107	600 × 265 × 220	5	2500
214108	800 × 400 × 330	6	5300



Ord. no.	Model	Dimension L x W x H mm	Weight g
211020	complete in Dönges Firebox	600 × 400 × 150	21000

Scope of delivery:
 1 pieces Dönges Firebox according to DIN 14880, size 3
 1 pieces Tool set DIN 14881



Dönges Tool box DIN 14881-FWKa

The hand-tool box with new a configuration in accordance with the revised DIN 14881:2013-12. In Dönges Firebox in acc. with DIN 14880-3-LM (600 × 400 × 150 mm) with aluminium dividers and "Handwerkzeug" lettering with individual description on request.



Dönges Tool box DIN 14881-FWKa

The hand tool box in a new configuration in accordance with the revised DIN 14881:2025-07 standard.

In Dönges FireBox according to DIN 14880, size 3, with foam inserts and the inscription "Handwerkzeug" (hand tools).

Ord. no.	Model	Dimension L x W x H mm	Weight g
203091	Complete in Firebox with foam inlay	600 × 400 × 150	21000

Scope of delivery:

- 1 pieces insulated flat-blade screwdriver, 2.5 mm
- 3 pieces flat-blade screwdrivers, 4–8 mm
- 3 pcs. Phillips screwdrivers, sizes 1–3
- 1 set long hex key sockets with ball head, 1.5–10 mm
- 1 set long Torx key sockets with ball head, sizes 15–45
- 1 set combination wrenches SW 8–32
- 1 pieces adjustable wrench 200 mm
- 1 set 3/8-inch socket wrenches, with square drive for hex screws SW 8–24 mm
- 1 pieces reversible ratchet, a short and long extension, and a universal joint
- 1 pieces new building wrench
- 1 pieces control cabinet wrench
- 1 pieces 500 g carpenter's hammer
- 1 pieces 4 mm split pin driver
- 1 pieces 250 mm edge pliers
- 1 pieces 160 mm VDE side cutters
- 1 pieces 160 mm VDE combination pliers
- 1 pieces VDE flat-nose pliers, 200 mm
- 1 pieces locking pliers, 250 mm
- 1 pieces water pump pliers, 250 mm
- 1 pieces angle pipe wrench, 1-1/2"
- 1 pieces metal hacksaw, 300 mm
- 10 pieces saw blades
- 1 pieces pry bar 400 mm
- 1 pieces flat chisel 200 mm with hand guard
- 1 pieces safety knife
- 1 pieces tape measure 3 m



Dönges Traffic accident-tools box DIN 14800-VUK

Traffic accident-tool set according to DIN 14800-13:2020-11. In Dönges FireBox according to DIN 14880, size 1 with aluminium compartments and inscription "Traffic accident". The holder for the glass master is already fitted inside the lid.



Ord. no.	Model	Dimension L x W x H mm	Weight g
201664	complete in Dönges Firebox	600 × 400 × 220	15000

Scope of delivery:

- 1 pieces Dönges FireBox according to DIN 14880, size 1
- 1 pieces Dönges Tool set for traffic accidents according to DIN 14800-13:2020-11



Dönges Power tool DIN 14885

Power-tool set according to DIN 14885:2013-12. In Dönges FireBox according to DIN 14880, size 4 with aluminium divisions and the inscription "Werkzeugkasten E".



Ord. no.	Model	Dimension L x W x H mm	Weight g
217805	Without foam inlay	400 × 300 × 150	7200
201151	With foam inlay	400 × 300 × 150	7500

Scope of delivery:

- 1 pieces Dönges FireBox according to DIN 14880, size 4
- 1 pieces Power tool set according to DIN 14885



Features:

- As an extension to the traffic accident box

Dönges High-Voltage Tool Kit in Aluminum Transport Box

In the modern world of electromobility, safety in the handling of high-voltage systems in electric vehicles (up to 1,000V) represents a significant challenge. To address this and ensure safe handling of such vehicles, especially in the event of an accident or breakdown, we offer a specially developed High-Voltage Tool Kit for electric vehicles. This kit comprises a carefully selected range of protective equipment and aids based on the experience of experts and the requirements of current operations.

The High-Voltage Tool Kit is an indispensable addition to the equipment of all emergency services working with electric vehicles. It not only offers considerable added value in terms of safety and efficiency in emergency response, but also helps to minimize the risk for emergency services and makes it easier to deal with the new technological challenges posed by electric vehicles.

In addition, the deployment case can of course also provide valuable assistance for other high-voltage applications up to 1,000V, such as PV storage systems or energy storage systems in households.

Scope of delivery:


1 pieces	Transport box
1 pieces	Document folder DIN A4
2 pieces	Handover protocol for high-voltage vehicles
1 pieces	Magnetic label for HV systems
12 pieces	Stickers for HV systems
1 pair	Electrician gloves size 10
1 pair	Cotton jersey gloves
1 pieces	Safety goggles
1 pieces	Protective visor
1 pieces	Guide number holder
1 pieces	Rubber cover blanket
2 pieces	Insulating cover blanket
4 pieces	10 × 60 mm push-on spout
4 pieces	10 × 100 mm push-on spout
1 pieces	Combination pliers with ceramic cutting edge
2 pieces	Plastic expanding wedge
1 pieces	Open-end wrench, insulated 10 mm
1 pieces	Open-end wrench, insulated 13 mm
2 pieces	Safety clamp small
2 pieces	Safety clamp short, without hook
1 pieces	Talcum powder
100 pieces	Special cable ties

Ord. no. Dimensions mm

202706 580 × 385 × 332

Weight g

10000

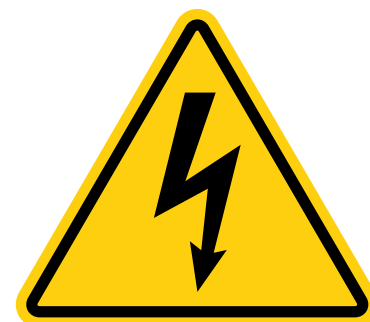

Glas-Master Glass and rescue saw

The Glas-Master is a manual glass-cutting tool for cutting out windows extremely quickly. Windows can be cut out in seconds without using electrical or hydraulic equipment.

Unlike various copies, only the original Glas-Master has the saw blade with the special tooth geometry and is ready for use immediately. The automatic spring centre punch is kept in the rubber-coated handle of the Glas-Master, with which side and rear windows can be opened. In order to use the punch, it is turned round and placed on the window. When a certain amount of pressure is applied, the punch is activated and shatters the safety glass.



Features:

- Sturdy, painted tubular steel body
- Interchangeable special saw blade
- Hand protection
- Non-slip, soft rubber grip for the front hand
- Two screw-on wall or vehicle holders



Ord. no.	Length mm	Weight g
212470	425	1400

Scope of delivery:

- 1 pieces Glassmaster
- 1 pieces Spring points (included in the handle)





GLASMANAGEMENT-SET



GLASS EXTRICATION SET

Glas-Master Glass management set

A tool-case in which the emergency services have everything at hand and ready once arriving at the scene of a traffic accident to obtain initial access to the victim through the front, side or rear window.

The sturdy plastic case contains partitioning made from industrial Plastazote which reliably secures the tools in place and keeps things organised. The set is recommended for patient-oriented rescue work.



Scope of delivery:

- 1 pieces Original glass master with special saw blade
- 1 pieces Original Glass Master Rescue Knife PRT II
- 1 pieces Feather Grains
- 1 pieces Safety goggles
- 1 pieces Panelling lifter
- 3 pieces Dust masks
- 1 pieces Tape dispenser
- 1 roll Adhesive tape for masking the side windows and easy lifting out the front window
- 2 bar Foils to cover the casualty during the work

Ord. no. Dimensions mm

212471 480 × 460 × 140

Weight g

3600

Dönges splinter-shield set

The new Dönges splinter-shield set was developed to provide optimum protection for trapped patients when using hydraulic rescue equipment or other mechanical work. The shields are simply positioned between the work area and the accidented victim as required.

The set includes a rectangular shield and a triangular shield. Both shields are equipped with adjustable rubber handles and thanks to the flexible material, they can be easily adapted to the conditions on site. Another advantage is the highly transparent soft PVC, as light conditions and visibility are not restricted.



Scope of delivery:

- 1 pieces Protective shield rectangular 600 × 400 mm
- 1 pieces Protective shield triangular 600 × 400 mm
- 1 pieces Protection and transport bag

Ord. no. Pack size mm

Weight g


215152 650 × 450 × 40

3700



Dönges protective blanket set

The Dönges protection blanket set is specifically designed for rescue operations and firefighting tasks. It protects vehicle parts and occupants from damage caused by tools and flying sparks. The protective blankets are made of high-strength, washable nylon fabric and tear-resistant nylon-polyester blend fabric, making them durable and reusable. The strut protectors can be securely fastened with Velcro straps, and a stable deployment

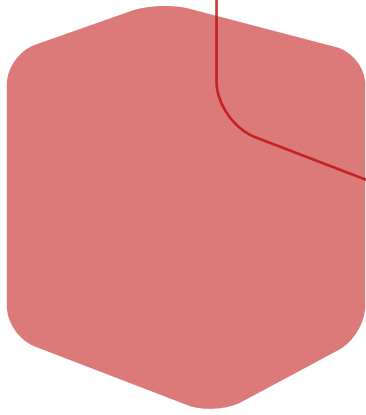

Features:

- Nine-piece protective blanket set for rescue operations
- High-strength, washable nylon fabric
- Tear-resistant nylon-polyester blend fabric
- Protection against damage from tools and sparks
- Secured by strong magnets and Velcro fasteners
- Includes sturdy preparation pad and carrying bag
- Pack size: 700 × 500 × 150 mm



tarp along with a robust carrying bag complete the set. Strong magnets keep the blankets in place. The set is ideal for professional users who value reliable protection and easy handling. It is designed for extreme conditions, ensuring that rescue workers can work efficiently and safely without worrying about possible damage to the vehicle or tools. Additionally, the set is easy to clean and quickly ready for use, making it an indispensable part of the equipment for rescue teams.

Scope of delivery:

- 1 pieces protective cover for front or rear window, 160 × 60 cm
- 2 pieces protective covers for side windows, 65 × 65 cm
- 4 pieces pillar protective covers, 28 × 43 cm
- 1 pieces preparation pad, 120 × 250 cm
- 1 pieces Transport bag

Ord. no.	Pack size mm	Weight g
250000	700 × 500 × 150	4500

Dönges Provisioning plan for drone landing site

The drone landing pad for firefighters is an essential piece of equipment that supports the safety and efficiency of drone operations. With its eye-catching yellow colour, it ensures excellent visibility, which is particularly beneficial in demanding operational scenarios.

The metal eyelets, located every 50 cm along the edge of the landing site, allow for easy attachment with pegs. This ensures that the landing area remains securely in place, even in strong winds or uneven terrain.

Made from a robust lorry tarpaulin with a weight of 800 g/m², this landing area is extremely hard-wearing and durable. B1 certification in accordance with DIN 4102 confirms its flame-retardant properties, making it a safe choice for use in demanding environments.



Technical data:

Color: yellow
Material: LKW-Plane, 510 g/m²,

Ord. no.	Dimensions cm	Weight g
202171	200 × 200	3000

Features:

- Truck tarpaulin in high quality with permanent print
- Completely hemmed and eyelets every 50 cm (Ø11 mm)
- Durable flexible tarpaulin, can still be folded/rolled up to save space even at low temperatures
- B1 certified - flame retardant according to DIN 4102



The drone landing pad can be labeled in any language



similar image

Dönges patient-protection blanket with exchangeable see-through window

Technical rescue with Dönges protection blanket: In traffic accidents, drivers or passengers are often trapped in a damaged vehicle. The Dönges patient-protection blanket protects the patient from glass dust, splinters, sparks, etc. when firefighter dismantle an accidented vehicle during a rescue operation.

See-through window for a quick response: Victims of accidents need medical care during the entire rescue process. This window enables medical staff to respond promptly to changing conditions.

The blanket (without window) is washable at 90°C. The surface of the see-through window must be disinfected after each use. The entire system has a fire resistance class CRIB 5.

The protection blanket will be delivered with a transport bag.

Features:

- Bacteriostatic
- Washable at 90 °C, suitable for tumble dryer (except viewing window)
- Disinfectable with commercially available agents
- Fire resistance class CRIB 5

Technical data:

Color:	red
Material:	57% PES, 43% PU
Material viewing window:	PVC
Viewing window:	50 × 50 cm

Ord. no.	Dimension L x W x H cm	Weight g
201140	120 × 200	1240



similar image



Dönges Airbag safety system

The Dönges airbag safety system reliably prevents rescuers from being injured by the opening airbag in the event of an unintentional airbag deployment during a rescue operation. Depending on the intended use, there are different sets for different vehicle classes.

Airbag-Safety-System Type 1: Set for the driver's side of cars and vans, for steering wheel diameters of 35-39 cm and 40-45 cm.

Airbag-Safety-System Type 2: Set for the driver's side of cars, vans and trucks, for steering wheel diameters of 35-39 cm, 40-45 cm and 43-50 cm.

Airbag-Safety-System Type 3: Set for the driver's side of trucks, for steering wheel diameters of 43-50 cm.

All sets are supplied in a sturdy plastic case.



Ord. no.	Model	Dimension L x W x H mm	Weight g
218400	Driver's side car/van/truck	395 x 295 x 106	2240
218420	Driver side truck	395 x 295 x 106	1300
218410	Driver's side car/van	395 x 295 x 106	1740

Ord. no.	Model	Dimension L x W x H mm	Weight g
218430	Passenger side universal	395 × 295 × 106	4232

Dönges passenger airbag-safety-system

The use of its five tensioning straps helps to quickly assemble the system (in approx. one minute) both with the roof removed and with an intact vehicle.

Supplied in a sturdy plastic case.



Scope of delivery:

- 1 pieces Airbag protection passenger
- 1 pieces Instruction manual
- 1 pieces Suitcase



Features:

- Set up without tools in just one minute
- Can be built by only one person
- Endlessly expandable thanks to zippers
- Height of the privacy wall about 180 cm
- Robust and durable



Dönges Screen wall, mobile

Gawkers have always been a major problem for emergency services. Since almost everyone carries a smartphone and can publish and share photos and videos almost immediately, this problem has taken on completely new dimensions in recent years. But it is not only the additional stress caused by the observers that is a problem, it is not uncommon for police forces to be called in to keep spectators at a distance. Accidents on the oncoming lane at motorway accidents are the daily routine.

With its small pack size, the mobile privacy screen can always be carried along. It can be completely assembled in just a few seconds by one person.

The wall consists of a robust, washable tarpaulin material and fibreglass rods. Numerous tabs and eyelets allow easy positioning and tensioning*. Zips are incorporated at the beginning and end of the wall, so that several walls can be connected together to protect even larger areas from unwanted visitors. It will be delivered in a sturdy transport bag.

*Tensioning set with three anchors, lines and carabiners each is available under item number 221301.

Technical data:

Pack size: 140 × 33 × 26 cm
Color: white/red

Ord. no.	Dimensions cm	Weight g
200271	180 × 720	16221





Features:

- Assembly without tools in just a few minutes
- Aluminum square tube against rust
- Telescopic for easy stowage in the transport bag
- Rubber feet for better grip
- Large turning knob for use with gloves

Dönges Stand set for privacy screen

The stand set is used to stabilize the screen wall! One stand is placed at each end of the screen and passed through the loops. The third stand is attached in the middle. For more stability the feet can be weighted or braced.

Technical data:

Material:	Aluminum
Dimension folded out:	185 × 96 cm
Pack size:	150 × 20 cm

Scope of delivery:

3 pieces Stand for screen wall
1 pieces Transport bag
1 pieces Instruction manual



Ord. no.	Weight g
201904	5300



Dönges shaped timbers in FireBox (HLF)

Shaped timbers in acc. with DIN 14530-11, stored in Dönges Firebox basket made by Zarges in acc. with DIN 14880-1-LM-O-G, 600 × 400 × 220 mm.

Ord. no.	Dimension L x W x H mm	Weight g
217368	600 × 400 × 220	23700

Scope of delivery:

- 6 pieces Wedge, 75 × 95 × 350 mm, sawed, hardwood
- 2 pieces Wedge, 35 × 95 × 350 mm, sawed, hardwood
- 2 pieces Beech plywood panel 50 × 200 × 350 mm waterproof glued, 3 mm chamfered
- 4 pieces Squared timber, 120 × 88 × 500 mm, made of glued laminated timber (softwood), waterproof glued, edges chamfered 3 mm, with carrying loop made of polyester rope with a diameter of 10 mm

Dönges Moulded wood WITHOUT FireBox (HLF)

Ord. no.	Dimension L x W x H mm	Weight g
202492	600 × 400 × 220	20000

Scope of delivery:

- 6 pieces Wedge, 75 × 95 × 350 mm, sawed, hardwood
- 2 pieces Wedge, 35 × 95 × 350 mm, sawed, hardwood
- 2 pieces Beech plywood panel 50 × 200 × 350 mm waterproof glued, 3 mm chamfered
- 4 pieces Squared timber, 120 × 88 × 500 mm, made of glued laminated timber (softwood), waterproof glued, edges chamfered 3 mm, with carrying loop made of polyester rope with a diameter of 10 mm



The item is shipped without a box!

Dönges stabilisation-system CrashStay

The CrashStay support system lives up to the "Made in Germany" seal of quality. Extremely robust, resilient, reliable and safe. A system you can rely on.

The supports can be extended completely steplessly over the entire length and then additionally retightened using the supplied control lever. For a 100% perfect fit in every situation. An eccentric shaft secures the support in a self-locking manner. Since the operating lever can be removed afterwards, an accidental release of the locking device is impossible.

The steel construction is not subject to material aging due to volatile plasticizers or UV radiation, as is the case with systems with plastic elements, for example. Even short load peaks or torsional stress can be withstood without splintering or cracks in the material.

The support system is delivered in a stable transport bag made of tarpaulin material.



Technical data:

Length retracted:	1.220 mm
Length pushed out:	2.000 mm
Max.load capacity of the support:	55 kN
Weight per support:	13 kg
Belt length:	5 m

Features:

- **Versatile use:** Ideal for technical assistance and stabilisation
- **Easy to use:** quick to set up and tighten
- **Stepless adjustability:** millimetre-precise adjustment of the supports over the entire length
- **Reliable application:** Secure hold thanks to self-locking mechanism
- **High robustness:** Extremely resilient and durable construction made of galvanised steel
- **Made in Germany:** Manufacturing with high quality standards



Scope of delivery:

2 pieces CrashStay support
1 pieces Transport bag

Ord. no.	Pack size mm	Weight g
201394	1.350 × 210 × 240	32000



Technical data:

DIN: 76051-53
 Load capacity: 6.500 kg
 Dimension L x W x H: 472 x 199 x 230 mm
 Radius: 560 mm

Features:

- Foldable design for easy handling and space-saving storage
- Durable material for long-lasting use
- Provides reliable protection against the vehicle rolling away unintentionally
- Eye-catching yellow colour for high visibility and increased safety
- Versatile and suitable for various vehicle types and sizes

Dönges Folding escapement Origamy G53

The Origamy folding restraint shoe is an innovative solution for safely protecting vehicles from rolling away unintentionally. The foldable design, inspired by the art of origami, enables easy handling and space-saving storage.

Manufactured from high quality, durable plastic, the Origamy bumper is extremely hardwearing and can withstand a range of vehicle sizes and weights. The eye-catching yellow colour and reflective stripes ensure high visibility, increase safety and prevent accidents. The Origamy brake shoe is an indispensable accessory for car owners, motorhome drivers, lorry drivers and anyone who values safe parking.



Ord. no.	Weight g
202209	965

Scope of delivery:
1 pieces Folding chock



Dönges Folding chock similar to DIN 14584 up to 50kN

The Dönges wheel chock is foldable and therefore particularly space-saving. A spring pre-tension allows the wedge to be unfolded easily and is immediately ready for use. Special tootingh on the underside enables use even in difficult terrain and when using towing equipment with mechanical drive (winch).

Due to the flexible chain strands, the wedge adapts optimally to the individual tyre size and replaces wedges of type G36, G46 and G53.

Technical data:

Statistical tire radius max.:	650 mm
Wheel load per wedge:	5.000 kg
Test force on the wedge min.:	7.500 N
Material:	Sheet steel

Ord. no.	Dimension L x W x H mm	Weight g
201123	750 x 200 x 98	13800

Features:

- Foldable and therefore particularly space-saving
- Suitable for applications of draw gears with mechanical drive
- Replaces wedges type G36, G46 and G53





Features:

- Compact design
- Mounting for standard spigots according to DIN 14640
- Up to 8-fold reduction in energy consumption with up to 40% higher luminous efficacy
- Extremely homogeneous light distribution modeled on the halogen spotlight
- Glare-free light without scattering losses due to SETO Xpect2 lens technology
- Cable winder on the back
- Variants for 230 V with waterproof plug IP68



Technical data:

Input voltage:	100-240 V resp. 10-35 V
Color temperature:	5.700/4.000 K
CRI:	>70
Illuminant:	2 x Xpect2 LED modules
Lifetime:	50.000 h
Ambient temperature:	-40 °C to +50 °C
Protection class:	IP65
Power consumption 230 V:	160 W
Power consumption 12/24 V:	120 W
Luminous flux:	23.000 lm
THW Part number:	6230T22400

Setolite Floodlight Aldebaran Gladius 2K

The ALDEBARAN GLADIUS 2K has an integrated cable reel with a 10 meter long cable as well as an integrated carrying handle and a DIN pin adapter at the bottom. This makes the ALDEBARAN GLADIUS 2K the universal lighting tool and an efficient replacement for conventional halogen lamps.

The new SETO XPECT2 LED lens system allows a high-range search-operation, as well as an extensive-lighting for near-range. This is the case without any scattering losses. The integrated SETO LifeView system provides a more natural color reproduction and an optimal performance even in adverse weather conditions. If this is the case, different light colors are mixed admirably in order to achieve optimized reproduction of the environment.

Ord. no.	Model	Luminous flux lm	Dimension H x W x D mm	Weight g
221372	230 V, 10 m connection cable	23.000	355 x 339 x 169	6500
200135	230 V, 1 m connection cable	23.000	355 x 339 x 169	5300
221472	12/24 V, 5 m connection cable	23.000	355 x 339 x 169	6500



Dönges Battery Floodlight Aldebaran Raptor R

The battery-powered floodlight Raptor R can be operated with batteries of the most well-known manufacturers and therefore offering the highest flexibility and speed while using. The Xpect LED module with pre-focused lenses delivers a homogeneous luminous flux of 10,000 lumens and is thus subjectively even brighter than a classic 1,000 W halogen spotlight.

The Raptor R can do more:

It is operated by two large push buttons on the back. The Raptor R can be dimmed to 50% or 25% for a longer runtime. In addition, the floodlight also offers three different flashing modes (flashing, strobing, double strobing). Together with the supplied attachment lenses in blue and orange, the Raptor R can also be used as signal light.



Universal for your existing system:

There are already a variety of battery-powered devices available for most vehicles. But the Raptor R integrates seamlessly regardless of which system you have already decided on. available on two different exchangeable battery plates for the 18 V system batteries of common manufacturers:

MBHP = Makita, Bosch, Hitachi, Panasonic

DMM = Dewalt, Metabo, Milwaukee

So, you don't have to buy a new system for the Raptor R and you don't have to control the battery management.

Ready for the future:

The Raptor R replaces the 1,000 W halogen floodlights in terms of dimensions, weight and light output and offers the well-known advantages of LED technology in terms of service life, heat generation, efficiency and light color. Thanks to the battery technology you are more flexible and faster than ever before. Insert the battery and illuminate the application site without compromises.



Features:

- Operation via 18 V system batteries of all common manufacturers
- Compact and robust
- Mounting for standard spigots according to DIN 14640
- With stand
- Particularly homogeneous light distribution modeled on the halogen spotlight
- Glare-free light without scattering losses due to SETO Xpect lens technology
- Continuous operation possible via optional power supply unit

Technical data:

Input voltage:	18 V
Color temperature:	4.000 K
CRI:	>70
Illuminant:	Xpect LED module
Lifetime:	50.000 h
Ambient temperature:	-40°C to +50°C
Protection class:	IP54 (batteries may have different protection classes)
Mains connection:	via separately available power supply unit
Runtime:	approx. 2 h at 100% with an 8 Ah battery pack

Details for the professionals:

Rubber corners as additional impact protection, holder for the attachment panes (attachment panes are included in delivery), comfortable carrying handle, robust stand made of 5 mm thick aluminum, multi-stage tilt adjustment mechanism, housing made of aluminum and V2A stainless steel, passive cooling, holder for standard spigots DIN 14640, neutral white light color, 230 V connection via separately available power supply unit - The Raptor R was consistently developed for professional use.



Ord. no.	Model	Luminous flux lm	Dimension L x W x H mm	Weight g
223300	MBHP	10.000	340 x 300 x 155	3650
223301	DMM	10.000	340 x 300 x 155	4700



Dönges LED floodlight 60 W

These LED floodlights offer state-of-the-art lighting technology at an unbeatable price. The LED light source has an average service life of over 8,000 operating hours and is not sensitive to vibration. The LED floodlights can also be operated on small generators without any problems. The large beam angle of approx. 150° enables good surface illumination with very good colour rendering. Thanks to the generously proportioned heat sink, the spotlights heat up only slightly even during long periods of use, which has a positive effect on the light emission of the LED. After use, the spotlights can be loaded again immediately without cooling down. The mounting sleeve according to DIN 14640 allows universal mounting on all standard pins.

Two versions are available: one version is specially designed for use in our spotlight container and is therefore equipped with a connection cable only 40 cm long. The stand-alone version is equipped with a 10 m connection cable.

Features:

- High-quality housing with powerful heat sink
- Hand lever for locking the tilt angle
- Aluminum locating sleeve for standard trunnion
- Power cable with pressurised waterproof plug IP68

Technical data:

Light color:	6.500 K
Protection class:	IP65
Illuminant:	LED
Energy efficiency:	A
Beam angle:	150 °
Voltage:	230 V

Ord. no.	Luminous flux lm	Dimension W x H x D mm	Connection cable m	Weight g
228340	6.000	265 x 300 x 115	0,6	2500
228341	6.000	265 x 300 x 115	10	3400

Dönges Aldebaran Raptor R with DMM exchangeable plate incl. battery

Scope of delivery:

- 1 pieces Aldebaran Raptor R DMM removable disk
- 1 pieces Spare battery 18.0 V 5.0 Ah Milwaukee

Ord. no.	Model	Luminous flux lm	Dimension L x W x H mm	Weight g
202599	DMM	10.000	340 x 300 x 155	4700

Dönges Fire Brigade LED Spotlight 120W

- High-quality housing with powerful heat sink
- Star knob screw for locking the tilt angle
- Mounting sleeve for standard spigot
- Connection cable with pressurised water-tight IP68 plug

Technical data:

Luminous flux:	22.000 lm
Light color:	4.000 K
Protection class:	IP65
Illuminant:	LED
Energy efficiency:	A
Beam angle:	120 °
Voltage:	220-240 V
CRI:	>70 Ra
Supply line:	H07RN-F 3G1,5



Ord. no.	Model	Dimension W x H x D mm	Connection cable m	Weight g
202243	for solo operation	340 x 215 x 70	10,0	5000

Technical data:


Voltage:	230 V
Protection class:	IP65
Connection line:	10 m (H07RNF3G1.5)
Dimension W x H x D:	558 x 447 x 187 mm

Dönges Headlight Mounting Kit, 2 x 60 W LED

Features:

- Optimal protection and safe transport of the headlights
- Cone and cone adapter according to DIN 14640
- Sturdy frame with ergonomic carrying handle
- With pressurized waterproof Schuko plug and two Schuko sockets (IP68)
- Pivot spacing adjustable from 33 cm to 47 cm
- Floodlights can be freely rotated and tilted

Ord. no.	Luminous flux lm	Weight g
200898	2 x 6.000	9000

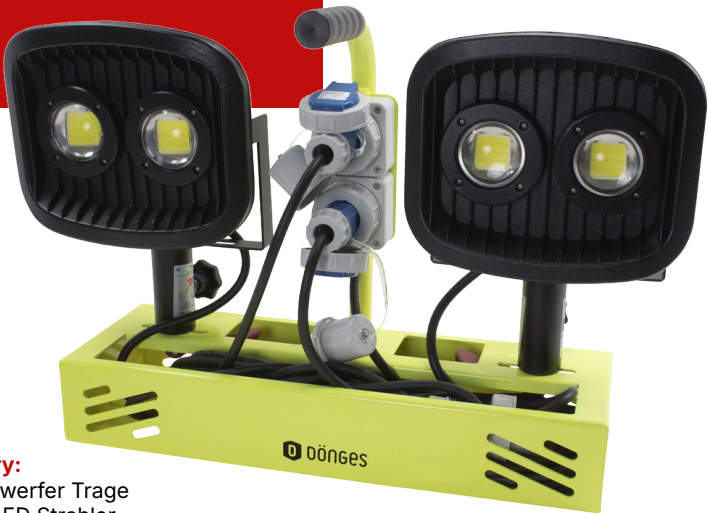

Scope of delivery:

- 1 pieces Scheinwerfer Trage
- 2 pieces 60 W LED Strahler
- 1 pieces Supply line

Technical data:

Voltage:	230 V
Protection class:	IP65
Connection line:	10 m (H07RNF3G1.5)
Dimension W x H x D:	558 × 447 × 187 mm

Dönges Headlight carrying set

The spotlight mounting kit featuring Seto's 160 W LED floodlights is the ideal companion for use in dark environments.

The Gladius 2K spotlights are based on the proven technology of the Raptor series.

The Xpect2 modules ensure extremely bright and, above all, efficient illumination. The two Xpect2 modules feature different lens attachments and colour temperatures for perfect illumination.

One module operates with a beam angle of 60° at a colour temperature of 4,000 K. The more yellowish light is ideal for close-range applications.

The second module operates with a beam angle of 25° at a colour temperature of 5,700 K. The bluish light is ideal for spot lighting.

With a power consumption of just 160 W, the Gladius 2K can easily replace a 2,000 W halogen spotlight.

The Dönges spotlight stand is designed for the rapid illumination of an incident site and can be mounted on any tripod with a DIN spigot. As no further assembly is required, the effort involved is significantly reduced compared to a system with a spotlight bridge.

The mount is equipped with two Schuko sockets (IP68) and features a 10 m long H07RN-F connection cable with a Schuko plug (IP68).

The cable can be conveniently stowed in the frame. The pins can be adjusted widthways using a quick-release fastener, allowing the two spotlights to be positioned individually.

**Features:**

- Optimal protection and safe transport of the headlights
- Cone and cone adapter according to DIN 14640
- Sturdy frame with ergonomic carrying handle
- With pressurized waterproof Schuko plug and two Schuko sockets (IP68)
- Pivot spacing adjustable from 33 cm to 47 cm
- Floodlights can be freely rotated and tilted

Scope of delivery:

1 pieces Headlight stretcher
2 pieces Floodlight 160W LED

Ord. no.	Model	Luminous flux lm	Weight g
200886	2 × 160 W LED	2 × 23.000	20500



Dönges floodlights V2 carrier

The Dönges floodlight carrying device is used for quick spotlighting of an area of operation and can be mounted on any tripod with a DIN cone. Since no further assembly is required, the effort is considerably reduced compared to a system with a floodlight bridge.

The carrying device is equipped with two waterproof sockets (IP68) and has a 10 m connection cable H07RN-F with waterproof Schuko-plug (IP68).

The cable can practically be stored in the frame. The cones can be adjusted in width with a quick-release, making the spotlight carrier suitable for almost all floodlights.

Features:


- Optimal protection and safe transport of the head-lights
- Cone and cone adapter according to DIN 14640
- Sturdy frame with ergonomic carrying handle
- With pressurized waterproof Schuko plug and two Schuko sockets (IP68)
- Pivot spacing adjustable from 33 cm to 47 cm
- Floodlights can be freely rotated and tilted

Ord. no.	Dimension W x H x D mm	Weight g
200929	558 × 447 × 187	4600

Technical data:

Voltage:
Protection class:
Connection line:

230 V
IP68
10 m (H07RNF3G1.5)

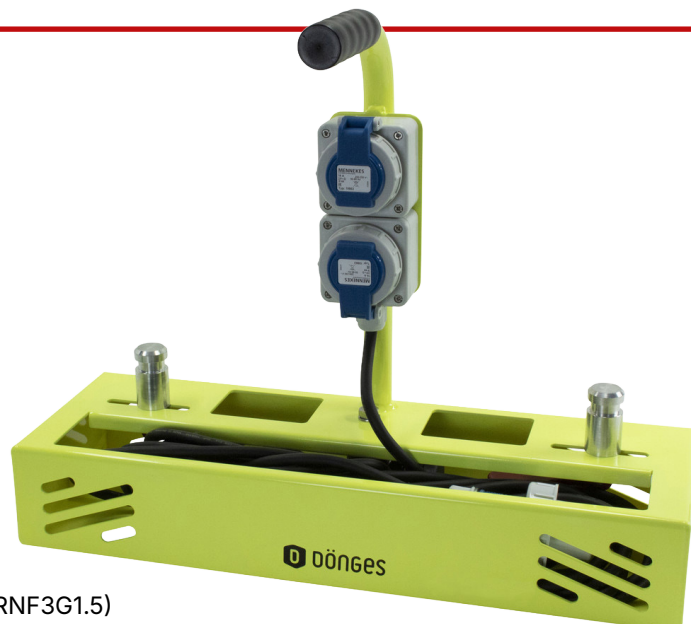

Features:

- Up to 145,000 lumen light output
- Up to 10 times longer service life with only 20 % of the energy consumption
- All-round light function - 180° each individually switchable on/off on request
- Suitable for mounting on tripod, as well as for hanging by integrated suspension ring
- Infinitely variable brightness control via rotary dimmer switch
- Change of the angle of attack of the modules, thus targeted illumination of the area
- Shock and vibration resistant LED illuminant
- No ignition specifications or cooling times - ready for immediate use!
- Compact transport in transport box (included in delivery)
- Locating sleeve for spigot according to DIN 14640



Setolite Setolite operation site floodlight, Aldebaran 360° FLEX-C LED 960 - 2.0

The consistent ongoing development of the successful Aldebaran 360° focuses on high flexibility and efficient use of the ultra-bright LED light. The possibility to choose between 360° all-round light and ambient lighting directed to the bottom, almost steplessly, opens up an immensely wide range of applications. Whether on construction sites, during rescue operations or at events. Using light effectively is the ultimate discipline of the 360° Flex LED.

The system is ready for use within a few minutes. Moreover, it can be used both indoors and outdoors. The integrated, intelligent control allows you to choose between half (180°) and full (360°) illumination. The brightness can be dimmed continuously by a dimmer. All switches can be operated comfortably even with gloves. The lamp has a holder for standard pins according to DIN 14640. In addition, the lamp has a ring so that it can also be suspended from ceilings, cranes, turntable ladders or similar. This set will be delivered in a sturdy transport box!



Technical data:

Power:	960 W
Illuminant:	4 x LED module á 240 W
Voltage:	240 V
Luminous flux:	145.000 lm
Protection class:	IP54
Light color:	5.000 K
LED lifetime:	50.000 h
Temperature range:	-30 to +40 °C
CRI:	>80
Dimension L x Ø:	812 x 227 mm



Ord. no. Item

Weight g

201694 Setolite Setolite operation site floodlight, Aldebaran 360° FLEX-C LED 960 - 2.0 JDDS5-L

JDDS5-E

20000

Setolite Operation site floodlight Aldebaran XLD-C Compact Basic

Lots of light and the fastest set-up time are the core features of the new Aldebaran XLD-C Compact. Like its big brother, the Aldebaran XLD 2-C, the Aldebaran XLD-C Compact is literally an extreme lighting tool: extremely robust, extremely flexible and extremely bright, it is enormously versatile and, above all, can be used quickly.

Thanks to its compact dimensions, it is particularly easy to stow away in the vehicle. The extremely robust housing made of an aluminium-nylon composite not only reliably protects the powerful inner workings, but also ensures an extremely low weight thanks to intelligent lightweight construction. In addition, the light is delivered in a sturdy transport bag that offers additional protection. This makes assembly and disassembly quick, easy and safe. The Aldebaran XLD-C Compact is supplied with a mounting sleeve for standard spigots. This can be inserted into the luminaire from above or below using a quick-release fastener. This makes it easy to operate the XLD-C Compact either normally or overhead. The mounting sleeve is suitable for spigots according to DIN 14640 and can therefore be attached to any standard tripod. Special pre-positioning discs can be used to further reduce glare, making the XLD-C Compact ideal for use in confined spaces.

Thanks to optional segment switching and a dimming function, the amount of light required can always be adjusted exactly to the need.

A swivelling mounting sleeve is also available as an option. This allows the luminaire to be swivelled in any direction and at any angle.



The Basic version can also be upgraded with optional interchangeable cables with a switch for segmental switching ("SWITCH" supply cable) or with a switch and dimming function ("DIM" supply cable). The supply cables can be easily exchanged via a plug connection underneath the housing.

Features:

- Optimum handling thanks to low weight and compact dimensions
- High light output, homogeneous illumination
- Passive, wear-free cooling technology
- Xpect2 LED Module Lens Optics
- Overhead operation possible due to integrated interchangeable pin

Technical data:

Power:	280 W
Illuminant:	4 x Xpect2 LED module
Voltage:	240 V
Luminous flux:	45.000 lm
Protection class:	IP67
Light color:	5.000 K
LED lifetime:	50.000 h
Temperature range:	-40 to +59 °C
CRI:	>70
Connection:	8 m rubber cable with plug
IP68	
Dimension L x W x H:	446 x 446 x 228 mm
Pack size:	450 x 500 x 150 mm

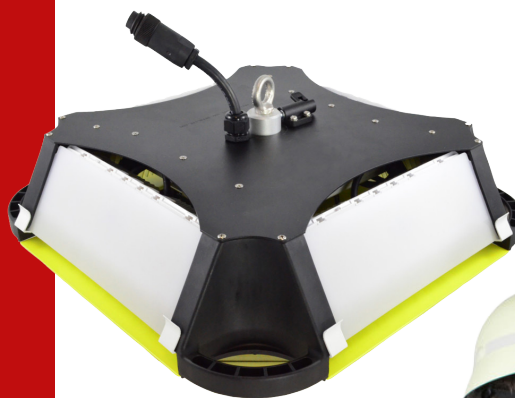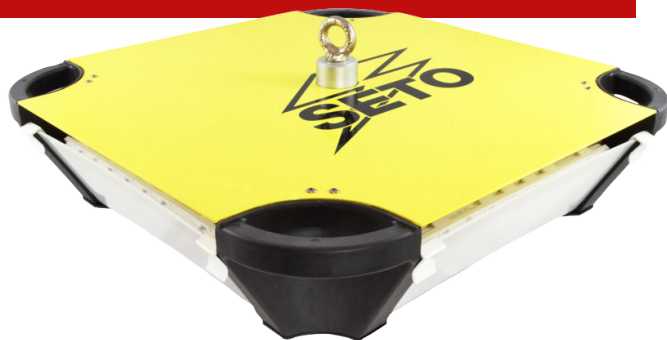

Scope of delivery:

- 1 pieces Aldebaran XLD-C Compact Basic
- 1 pieces Mounting sleeve rigid
- 4 pieces Faceplates (diffuser)
- 1 pieces Transport bag
- 1 pieces Connection cable (without dimming and switching function)



Ord. no.	Color	Weight g
201667	yellow	11500

Setolite Power LED operation site floodlight

This high-performance luminaire represents the latest in mobile LED technology. It is robust, virtually maintenance-free and easy to handle.

The head of the luminaire consists of 30 highly efficient LEDs, which provide the user with a radiantly bright light and are ideal for illuminating workplaces. The fully focusable three-stage optics make this luminaire a versatile and reliable companion. The SETO POWER LED is characterized by an impact-resistant polymer housing and inner steel parts in such combination that guarantees a high level of safety for the entire device.

The four "Quicklock" extension rods allow the lamp head to be raised from 820 mm to 1800 mm. These uniquely designed, interlocking rods allow for a very simple yet stable system that can be extended quickly and whose parts can be stowed in a special holder on the unit itself.

In addition, the SETO POWER LED offers a pair of fold-out legs that make the light unit into an effective tripod system and provide additional stability without the need for additional equipment.

Features:

- Fully focusable 3-stage optics
- Integrated diffusing lens in the luminaire head
- Different brightness levels
- Powerful battery
- Maximum height 1.80 m




Scope of delivery:

- 1 pieces Seto Power LED
- 1 pieces Battery
- 1 pieces Power supply unit 230V
- 4 pieces Quicklock rod

Technical data:

Lighting duration:
lm
Illuminant:
Luminous flux:
Loading time:
Protection class:
Battery type:

33 h at 1,000 lm, 8 h at 4,000
lm
30 High Power LEDs
4.000 lm
approx. 9 h
IP54
Lead-gel

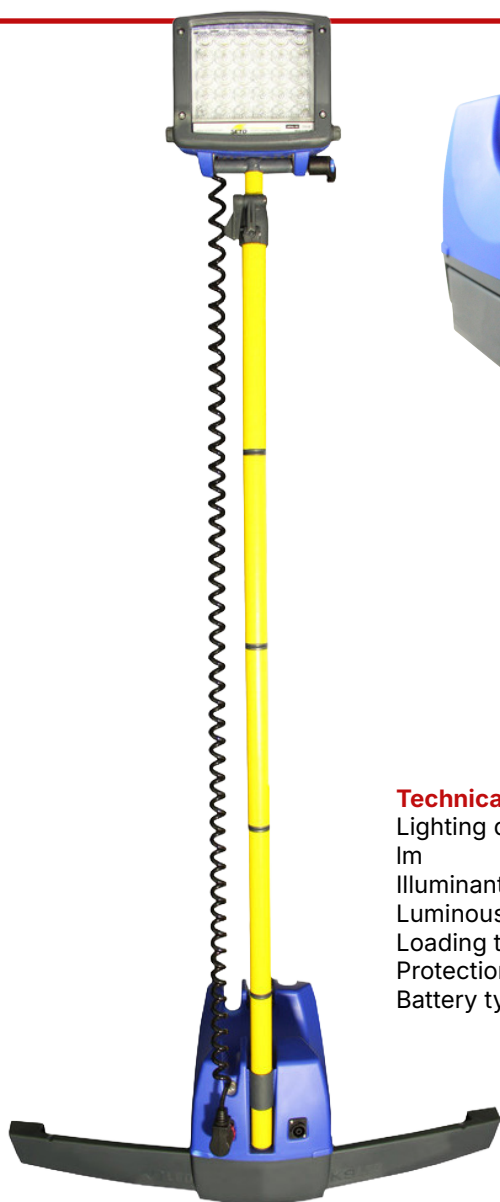

Ord. no.	Pack size mm	THW Part number	Weight g
201026	390 × 195 × 255	6230T22399	11800

Features:


- Standard spigot for mounting headlights and bridges according to DIN 14640
- Feet individually height adjustable for level compensation
- According to new DIN 14683
- Compact dimensions and low weight
- High stability



Dönges Tripod DIN 14683

Lightweight tripod for one spotlight with mounting adapter according to DIN 14640. The tripod can be quickly and easily adapted to uneven ground by means of the three extendable legs. The moulded feet ensure a secure stand.

The steel tubes are galvanised or painted in yellow warning colour RAL 1012. The tripod can be tied down with a permanent tensioning strap when folded.



Technical data:

Height max.:	1,82 m
Length inserted:	1,15 m
Load capacity:	13 kg
Standards:	DIN 14683
Pack size:	1.160 × 100 × 100 mm

Ord. no.	Weight g
221316	4301

Dönges Telescopic tripod stainless steel with air damping DIN 14682

Stainless steel does not corrode. Normal, galvanized telescopic tubes cannot be pulled out easily after a short time if they are not cleaned properly. This cannot happen with our stainless steel tripod - not even after many years. In addition, we have provided the mechanism of the tripod with an air-suspension. This means that the tripod retracts gently after loosening the thumb screws, even if a headlamp container with two headlamps is mounted. The danger of damage or even injuries when retracting the tripod is thus eliminated.

The tripod can be additionally secured with the bracing set included in the scope of delivery to further increase stability.

Features:

- According to DIN 14682
- Material stainless steel - never rust again
- Air damped for safe and comfortable operation
- Standard spigot according to DIN 14640 for mounting headlights, bridges, etc.
- Feet adjustable for level compensation
- Fits all standard vehicle mounts

Technical data:

Height max.:	4,75 m
Packing size L x W x H:	1.120 x 200 x 200 mm
Load capacity:	25 kg
THW Part number:	6230T22410



Ord. no.	Item		Weight g
221315	Dönges Telescopic tripod stainless steel with air damping DIN 14682	JDDS5-T	13300



Dönges Telescopic tripod with air damping DIN 14682

The Dönges telescopic tripod with air-suspension reaches a height of over 4.75 m when extended, is extremely stable and, thanks to the supplied and easy-to-use bracing set, absolutely stable even at this height. Thanks to the high-quality manufacturing, a long service life is ensured. Thanks to the integrated air-suspension, the emergency personnel and also the equipment are particularly protected. An uncontrolled falling of the poles is effectively prevented.

The tripod fits into the standard mounting of most firetrucks. The individually extendable feet easily compensate for uneven ground. All locking mechanisms are easily and safely operated by means of large wing screws, even when wearing gloves. The tubes are clamped using a large-area pressure mechanism which prevents deformation of the individual telescopic tubes. The steel tubes are galvanised or orange painted. The stand can be tied down by means of a captive tensioning strap when folded. A centring piece holds the legs securely together.

The tripod can be additionally secured with the bracing set included in the scope of delivery to further increase stability.



Technical data:

Height max.:	4,75 m
Packing size L x W x H:	1.120 x 200 x 200 mm
Load capacity:	25 kg
THW Part number:	6230T22410

Features:

- According to DIN 14682
- Standard spigot for mounting headlights and bridges according to DIN 14640
- Feet individually height adjustable for level compensation
- Special stop for centering the legs for transport
- Special clamping system for fixing the pipes

Ord. no. Item

201334 Dönges Telescopic tripod with air damping DIN 14682 JDDS5-T

Weight g

13500



Dönges Cable reel fire department, DIN 14680, 230 V

Our EN 61316-compliant reels are small and compact, and therefore fit in any existing vehicle apertures. The extremely sturdy double tube frame (22 mm) is silver coated.

Both reels are approved in accordance with all of the usual vehicle loading standards (LF/HLF 10/6, LF/HLF 20/16, equipment vehicle and TSF-W).

Ord. no.	Cable length m	Connection	Dimension W x H x D mm	Weight g
221312	50	Schuko	315 x 360 x 300	15800

Features:

- High carrying comfort due to ergonomic carrying handles and perfectly balanced frame
- Unique cable guide prevents tangling of the cable
- Special design of the frame prevents the cable from sliding behind the drum
- Drum brake inside, maintenance-free and operated via star grip
- Pressed-in steel tube axle with best smooth running properties
- Thermal overload protection

Technical data:

Input:	1 x plug Schuko IP68
Output:	3 x coupling Schuko IP68
Load capacity:	16 A
Management:	H07RN-F3G2.5
Protection class:	IP54
Standards:	DIN 14680, EN 61316



Dönges Cable reel fire department, DIN 14680, 230 V/400 V, 16 A

Our cable reels according to EN 61316 are small and compact, and therefore fit into all common vehicles. The extremely sturdy frame is silver-coated.



Ord. no.	Cable length m	Connection	Dimension W x H x D mm	Weight g
221322	50	CEE 5-pin, Schuko	350 × 430 × 295	20500

Features:

- High carrying comfort due to ergonomic carrying handles and perfectly balanced frame
- Unique cable guide prevents tangling of the cable
- Special design of the frame prevents the cable from sliding behind the drum
- Drum brake inside, maintenance-free and operated via star grip
- Pressed-in steel tube axle with best smooth running properties
- Thermal overload protection



Technical data:

Input:	1 x plug CEE 5-pin IP67
Output:	1 x Coupling CEE 5-pin IP67
Output 2:	3 x coupling Schuko IP68
Load capacity:	16 A
Management:	H07RN-F5G2.5
Protection class:	IP54
Standards:	DIN 14680, EN 61316

**Dönges Cable reel fire department,
according to ÖBFV, 230 V, 16 A**



Technical data:

Input: 1 x plug Schuko IP44
Output: 3 x coupling Schuko IP44
Load capacity: 16 A
Management: H07RN-F3G2.5
Protection class: IP54
Standards: ÖBFV

**Dönges Cable reel fire department,
according to ÖBFV, 230 V/400 V, 16 A**



Technical data:

Input: 1 x plug CEE 5-pin IP44
Output: 1 x Coupling CEE 5-pin IP44
Output 2: 2 x coupling Schuko IP44
Load capacity: 16 A
Management: H07RN-F5G2.5
Protection class: IP54
Standards: ÖBFV

Ord. no.	Cable length m	Connection	Dimension W x H x D mm	Weight g
201136	30	Schuko	285 × 385 × 224	8450

Ord. no.	Cable length m	Connection	Dimension W x H x D mm	Weight g
201137	30	CEE 5-pin, Schuko	285 × 385 × 244	11550

The high-quality and robust cable reels from Dönges are specially tailored to the needs of our customers in Austria. The quality plug connections from Mennekes with protection class IP44, the special rubber cable with 2.5 mm² cross-section per cable and the stable basic body make this cable reel so interesting for the fire brigade and guarantee a long service life.

The frame consists of a Ø22 mm steel tube, welded and silver coated. The plastic drum body is permanently pressed on and has excellent smooth running properties. The ergonomic carrying handle, the drum brake and the proven cable routing optimise handling during operation.



Features:

- High carrying comfort due to ergonomic carrying handles and perfectly balanced frame
- Unique cable guide prevents tangling of the cable
- Drum brake on the back
- Axle with best smooth running properties

Features:


- Ideal for car breakdowns and for marking barriers and danger spots
- Visible from all directions (360°)
- Easiest handling
- Easy to store due to small space requirement, fits in any trunk and under the car seat
- Better stability due to the foot poured with solid rubber
- Higher stability compared to the standard version due to higher weight
- With integrated, powerful flashing light for even better visibility in the dark or with diffuse light
- Flasher splash-proof
- Battery life over 300 hours

Dönges Folding Guide Cone

The original from Dönges foldable traffic cone with integrated lighting.

With their dimensions and significantly higher weights, the Pro versions are predestined for use by fire brigades and disaster control units on busy roads or motorways. The heavy solid rubber base provides increased stability and durability.

The Pro versions are also available in partially and fully reflective versions. Together with the integrated LED lighting, which can be switched to continuous and flashing light, these folding traffic cones are the ideal complement to warn of danger and emergency locations.

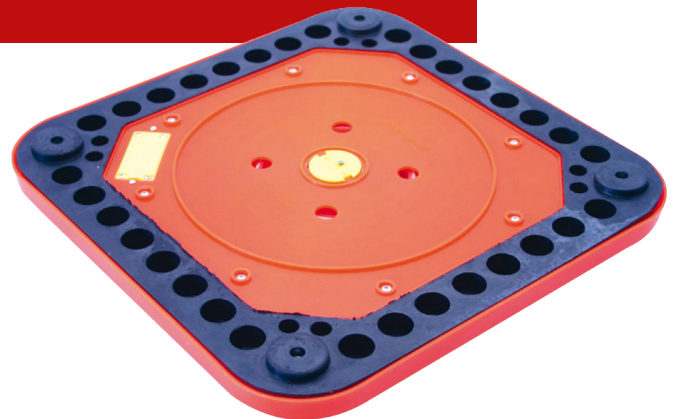

Scope of delivery:

1 pieces Folding Guide Cone
1 pieces PVC carrier bag
2 pieces AAA battery

Ord. no.	Height mm	Model	Packing size L x W x H cm	Weight g
218145	500	Pro version, partially reflective	28 × 28 × 6	1800
218146	500	Pro version, fully reflective	28 × 28 × 6	1800
218150	750	Pro version, partially reflective	39 × 39 × 6	3200
218151	750	Pro version, fully reflective	39 × 39 × 6	3200




Dönges Signal lamp with LEDs

Hazardous areas can be effectively secured.

Technical data:

Dimension H x Ø:	35 × 105 mm
Operating temperature:	-20 °C to +57 °C
Protection class:	IP67
Battery:	3,7 V, 750mAh, 4,07 Wh

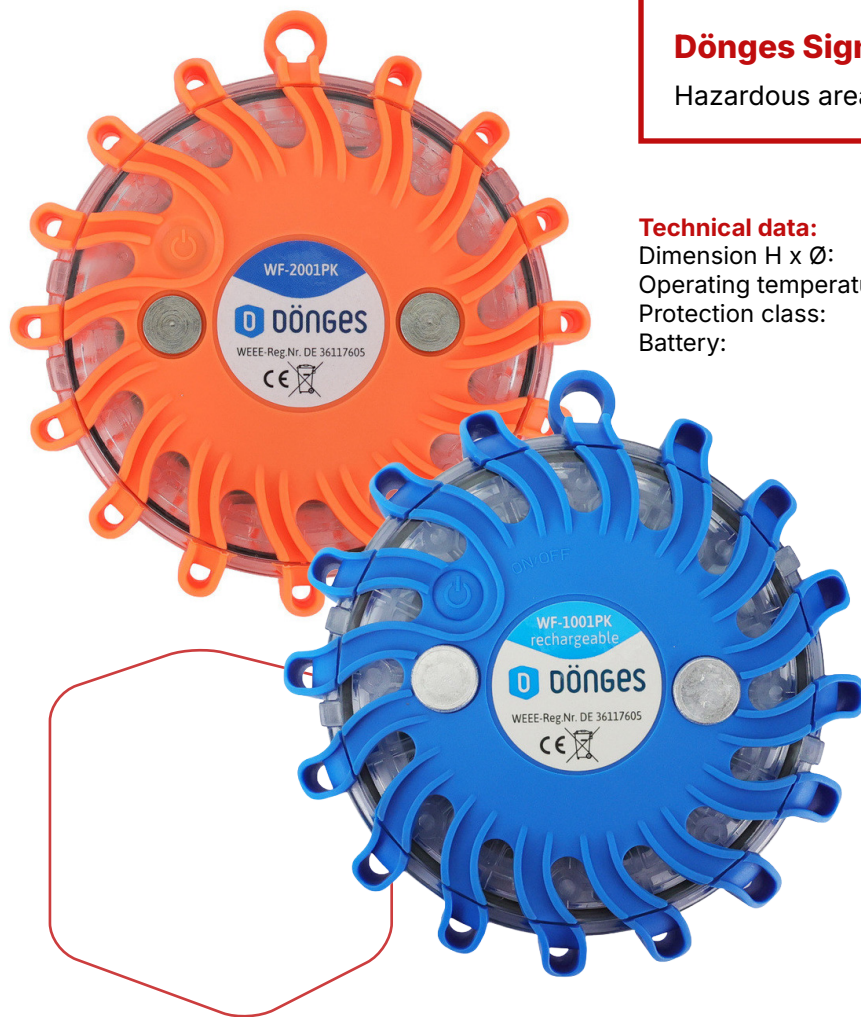

Features:

- Excellent visibility due to 16 colored LEDs
- Nine different functions (flashing, continuous, gyro light)
- Shock-resistant due to all-round rubber coating
- Flashing time up to 100 hours depending on mode
- Battery-powered model: Requires AAA batteries
- Version with rechargeable battery including 12/24/230 V charger
- Not approved for use on public roads (no TL/BAST approval)

Ord. no.	Color	Model	Weight g
218838	orange	Battery version	230
218839	orange	rechargeable battery version	230
218842	blue	rechargeable battery version	230



Dönges LED signal lamp set in case, with charger USB/12V/220V

Set with six emergency LED-Flares, rechargeable battery version, in a practical transport case. The transport case is a charging station for the emergency lights as well. The necessary plugs for charging with 12/24 V in the vehicle or with 230 V at the mains are also included.



Technical data:

Dimension H x Ø:	35 x 105 mm
Operating temperature:	-20 °C to +57 °C
Protection class:	IP67
Battery:	3,7 V, 1.100 mAh, 4,07 Wh


Scope of delivery:

6 pieces	Signal lights, accu version
1 pieces	Plastic case
1 pieces	USB charging cable
1 pieces	Power plug 230 V
1 pieces	Car plug 12/24 V

Ord. no.	Color	Packing size L x W x H cm	Weight g
218840	orange	45 x 36,5 x 7	3200

Features:

- Excellent visibility due to 16 colored LEDs
- Nine different functions (flashing, continuous, gyro light)
- Shock-resistant due to all-round rubber coating
- Flashing time up to 100 hours depending on mode
- Version with rechargeable battery including 12/24/230 V charger
- Not approved for use on public roads (no TL/BAST approval)

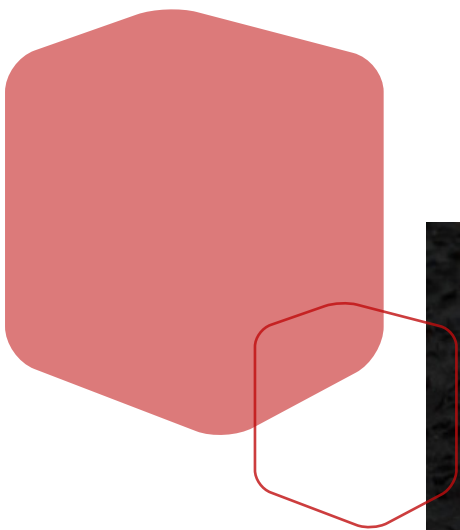



Features:

- Excellent visibility through 8 + 4 colour RGB LEDs
- Six different, synchronisable running light functions
- Shock-resistant and waterproof (IP67) thanks to all-round rubberisation
- Depending on mode up to 48 hours operating time
- Rechargeable including 12 V/230 V charging device
- Automatic activation and synchronisation upon extraction
- Color change on the touch of a button: yellow, blue or green
- Display of the battery charge level possible
- Not approved for use in areas covered by the Road Traffic Regulations (no TL/BAST approval)

Dönges LED signal lamp set SyncFlare

The new Dönges SyncFlare signal-lamp set is quick and easy to use. The individual lights activate and synchronize automatically as soon as they are removed from the magnetic holder of the transport box. Perfect for all situations that require a quick reaction.

The 360° LEDs are arranged all around and are visible from a very long distance. In addition, four LEDs radiate upwards to increase visibility even more.

Thanks to the robust and waterproof (IP68) housing made of impact-resistant plastic, the flares are almost indestructible and can even be rolled over by vehicles weighing 3 tons.

Choose from 6 different chaser modes and three different colors: yellow, blue or green.

The set contains 6 lights, a transport and charging box and a charger for 230 V and 12 V connection.

Scope of delivery:

- 6 pieces Signal lamps, battery version
- 1 pieces Plastic case with charging function
- 1 pieces Charging cable
- 1 pieces Power supply 230 V
- 1 pieces Plug 12 V



Technical data:

Dimension module H x Ø: 39 x 118 mm
 Operating temperature: -20 °C to +57 °C
 Protection class: IP67
 Dimensions of the case: 355 x 275 x 105 mm
 Number of LEDs: 8 + 4
 Light output: 5,2 W
 Temperature range: -40 bis +60 °C
 Voltage / Capacity: 3,7 V / 3.000 mAh

Ord. no.	Housing color	Packing size L x W x H mm	Light color	Weight g
218850	orange	275 x 375 x 115	changeable yellow/blue/green	3200

Dönges LED 360° signalling light set for traffic cones in a case

The Dönges LED signalling light set is the ideal solution for safeguarding hazardous areas and for use in professional applications. Thanks to 30 powerful SMD LEDs, the lights offer excellent visibility, even in poor weather conditions or in the dark.

The set impresses with five sequential running light functions that enable flexible and conspicuous signalling:

- Sequential group flashing (lights flashing with a time delay)
- Slow double flash
- Fast double flash
- Wave-shaped flashing (pulsating running light)
- Simultaneous group flashing

In addition, each individual lamp has six individually adjustable single functions:

- Rotating light
- Quadruple flash
- Single flash
- Alternating flash
- Continuous light with high intensity
- SOS signal

With a shock-resistant and waterproof design, the lights are ideally suited for robust outdoor use. They are automatically activated and synchronised as soon as they are removed from the case - this saves time and ensures that they are immediately ready for use.

Thanks to an operating time of up to 48 hours (depending on the mode), the lights are extremely long-lasting. The set is rechargeable and is supplied with a 12 V charging cable.

Please note: The lights are not authorised for use in the area of the StVO.



Technical data:

Dimension L x W x H:	440 x 389 x 110 mm
Dimension module H x Ø:	42 x 175 mm
Inner diameter:	84 - 95 mm
Operating temperature:	-20 °C to +57 °C
Protection class:	IPX7
Number of LEDs:	30
Light output:	15 W
Temperature range:	-40 bis +60 °C
Voltage / Capacity:	3,7 V / 2.200 mAh



Features:

- Excellent visibility thanks to 30 SMD LEDs
- Five different synchronisable flashing modes for group use
- Six different flashing modes for use with a single module
- Shock-resistant and waterproof
- Up to 48 hours of operating time, depending on the mode
- Rechargeable, including 230 V and 12/24 V charging cables
- Automatic activation and synchronisation upon removal
- Not approved for use on public roads (no TL/BAST approval)

Ord. no. Weight g

202703 3500

Scope of delivery:

- 7 pieces Signal lights
- 1 pieces Transport case
- 1 pieces Charging cable 230 V
- 1 pieces Charging cable 12/24 V



Dönges Folding guide board

The folding direction board is an extremely useful addition to the usual warning materials during operations. It is ideal for cordoning off vehicles that have been involved in accidents and dangerous areas.

The extremely sturdy mat made from tarpaulin material has eight suspension eyes and eight powerful magnets at the edge. It is therefore easy to secure in almost any location and on many different surfaces.

The four columns consist of retro-reflective film and each have nine integrated LED's which are extremely bright. The LED's in the waterproof casing are powered by 4 x AA 1.5 V batteries. One set of batteries is adequate for 50 hours of operation. Once the LED's have been switched on, the columns illuminate in sequence and therefore lead away from the obstruction. This effect is visible from a long way off and provides additional safety at the operation site, not just during the hours of darkness.

Ord. no.	Dimension L x W mm	Weight g
218158	820 x 440	1125



Features:

- Operating modes running light, flashing light, continuous light
- PVC upper
- Reflector arrows with reflection class I
- Switch splashproof
- Mounting possible via integrated magnets or eyelets
- Delivered in a sturdy transport bag
- Batteries 4 x AA not included

Dönges Folding signal

The high quality foldable signals have an excellent price-performance ratio. All versions have a sturdy frame made from galvanised steel with a spring-mechanism. As well as an eyelet for an additional weight, a standard pin to take in a blinking light and a carrying handle at the top. Both versions can be supplied with two different standard prints. Optionally, we can offer separately an adapter to mount the foldable signals onto a tripod. Delivered in a sturdy transport bag.





Features:

- Durable, long-lasting material
- Insensitive to dirt
- Weatherproof print in black/red
- Stable due to high weight

Print is
available in any
language.

Ord. no.	Height mm	Model	Imprint	Weight g
218110	700	retroreflective	Fire department, accident, oil spill	3300
218108	700	retroreflective	3 x fire department	3300
218104	700	Day Glow Paint	Fire department, accident, oil spill	3300
218100	700	Day Glow Paint	3 x fire department	3301
218722	900	retroreflective	Operation, construction site, accident	4300
218114	900	retroreflective	Fire department, accident, oil spill	4300
218112	900	retroreflective	3 x fire department	4300
218106	900	Day Glow Paint	Fire department, accident, oil spill	4300
218102	900	Day Glow Paint	3 x fire department	4300



Ord. no.	Color	Weight g
201337	Blue	480
201336	Yellow	480
201338	Green	480
201339	Purple	480
201340	red	480
201341	Black White	480
201342	White	480



Dönges identification vest

The Dönges identification vest is truly a functional vest. Thanks to many detailed solutions, the vest offers much more than the actual task of marking the function of its user.

For a lot of equipment:

There is plenty of space for equipment in the generous pockets. Whether writing pad, radio, lamp, knife or mobile phone - everything can be conveniently stowed away here. Many loops to secure the equipment and attach a headset.

Adjustment:

Thanks to hook and loop adjustment on the side, the width of the vest can be adjusted. So, it always fits perfectly which reduces the risk to get caught unintentionally.

Name and function labels can be attached to the fleece areas on the chest and back.

Any accessories in the product photos are for illustration purposes only and are not included in the scope of delivery. The vest is supplied without accessories.


Technical data:

Material: 100% cotton
Size: S-XXL (universal size)

Scope of delivery:

1 pieces Identification vest (without contents/accessories)



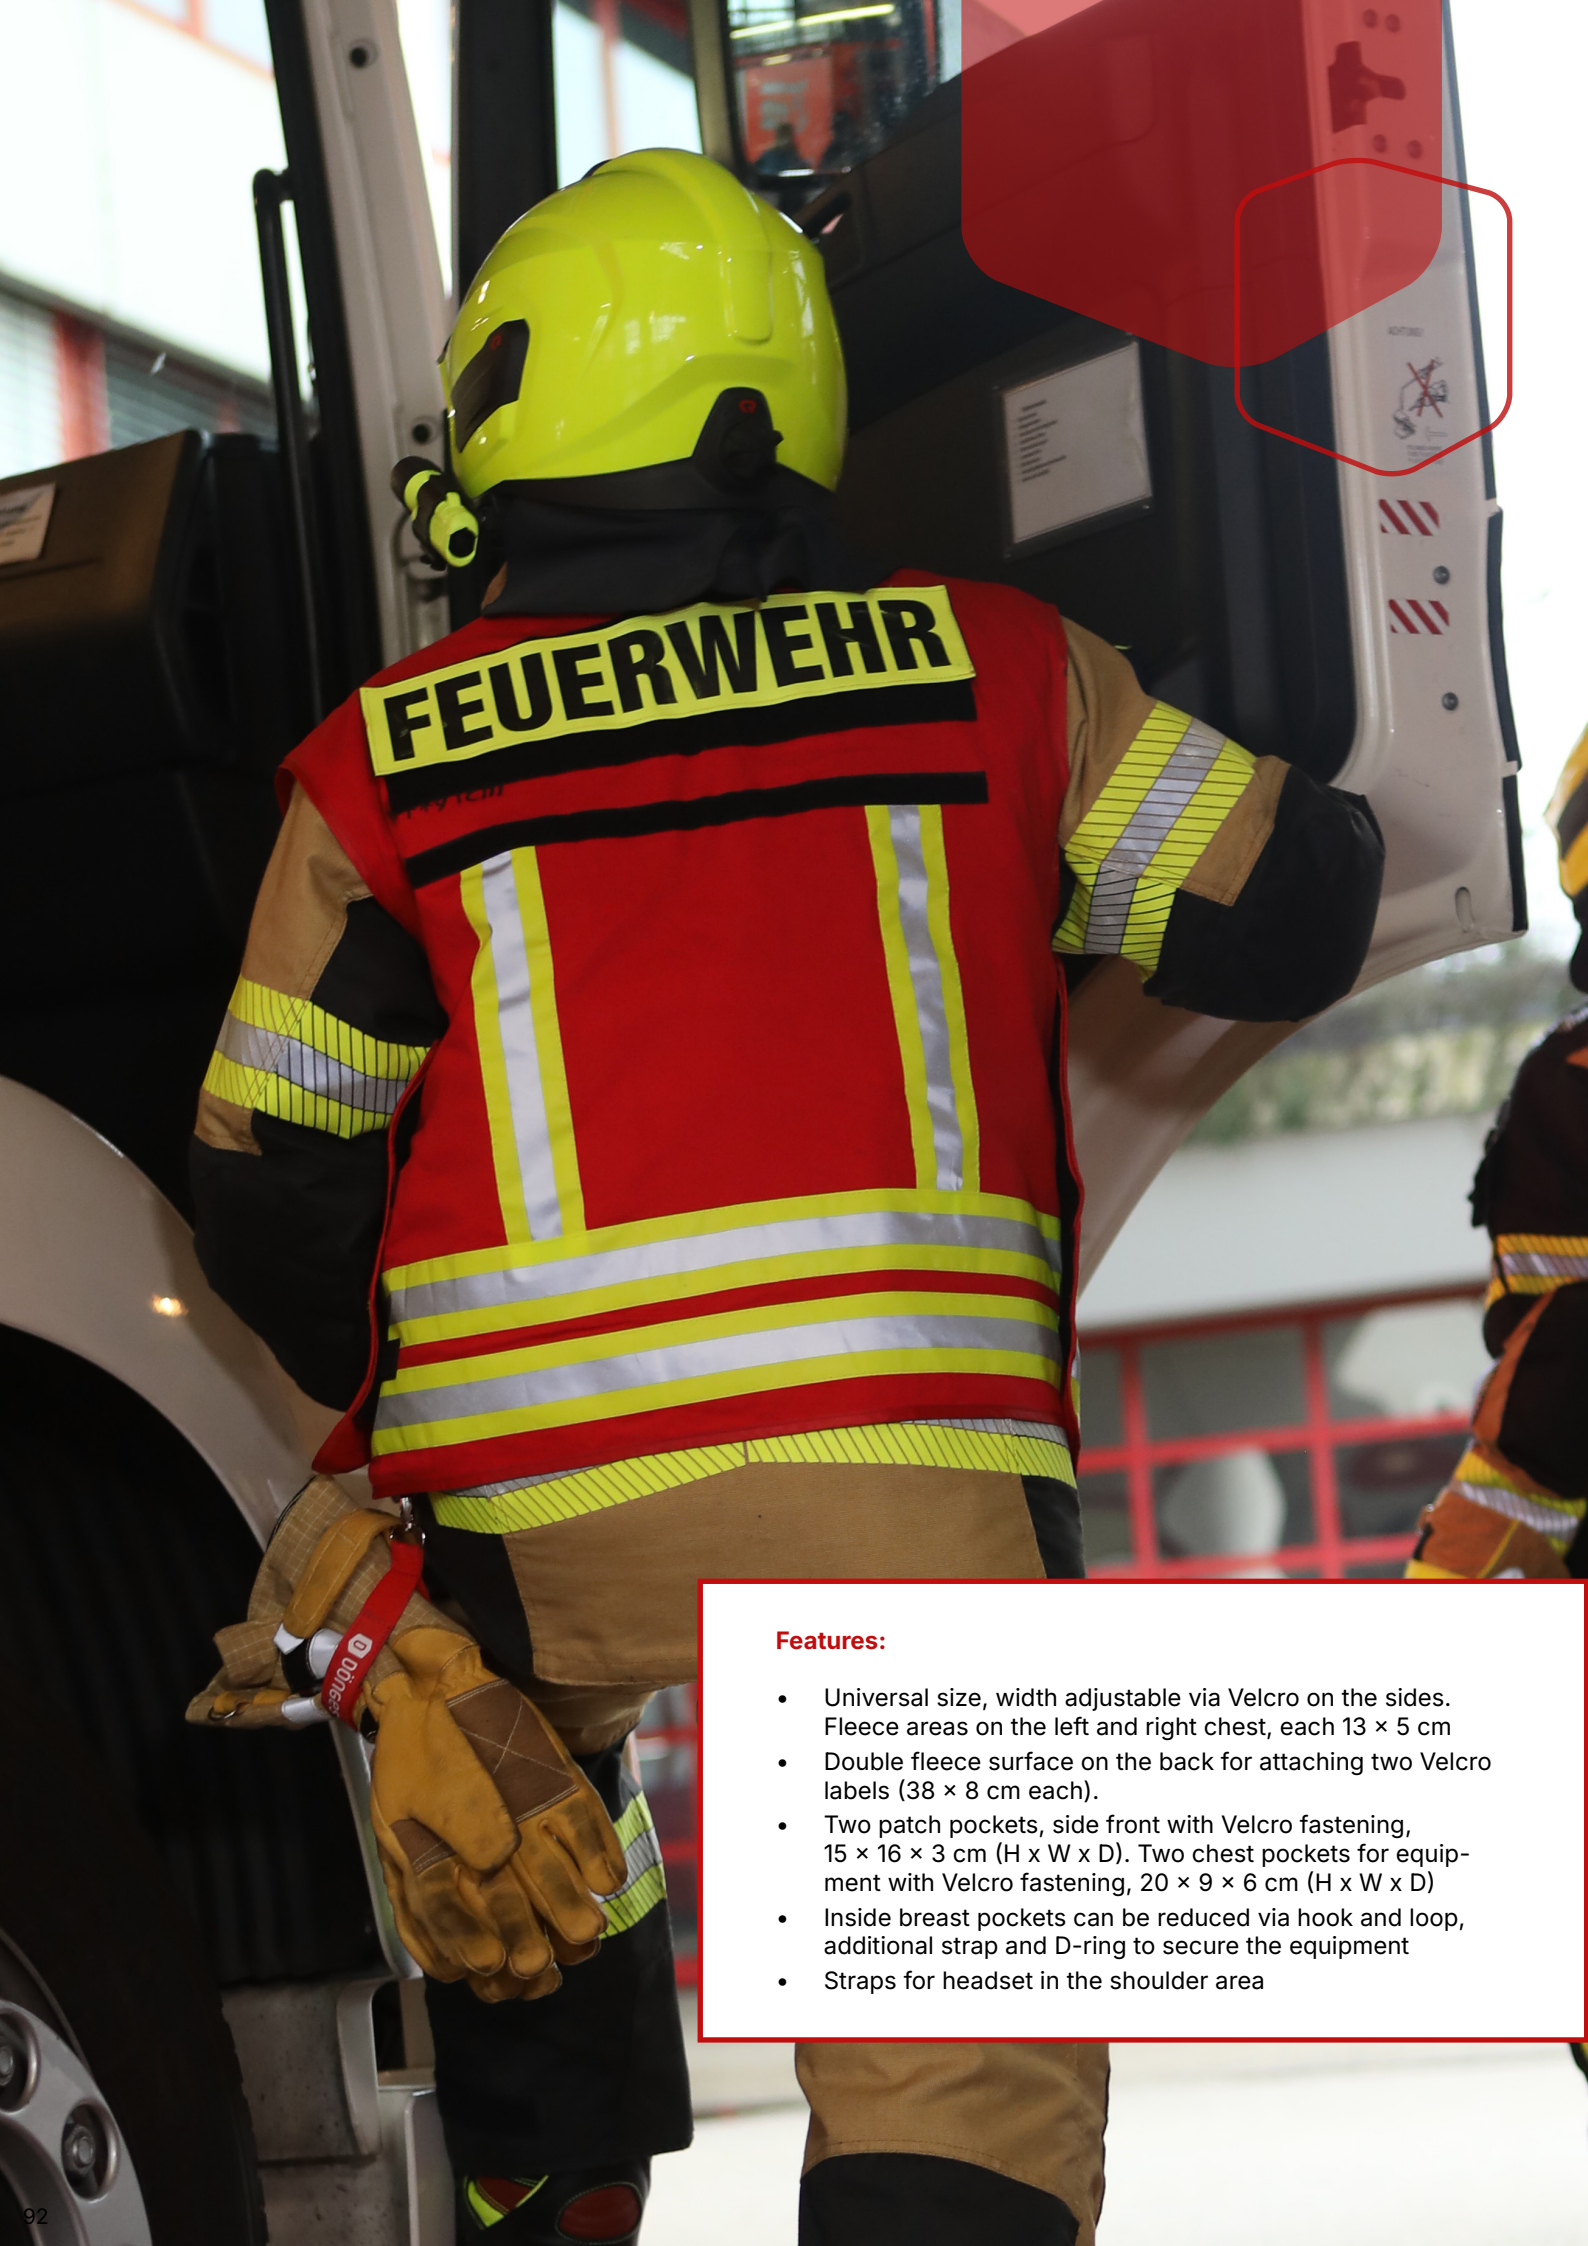

Features:

- Universal size, width adjustable via Velcro on the sides. Fleece areas on the left and right chest, each 13 × 5 cm
- Double fleece surface on the back for attaching two Velcro labels (38 × 8 cm each).
- Two patch pockets, side front with Velcro fastening, 15 × 16 × 3 cm (H x W x D). Two chest pockets for equipment with Velcro fastening, 20 × 9 × 6 cm (H x W x D)
- Inside breast pockets can be reduced via hook and loop, additional strap and D-ring to secure the equipment
- Straps for headset in the shoulder area

Dönges Strap dispenser red/white striped

Belt dispenser
The belt dispenser can be simply and easily attached to a large number of existing traffic cones (pylons). With a belt extension length of 9.00 m per dispenser, it is quick and easy to cordon off large areas.

Ord. no.	Dimension H x W x D mm	Belt length m	Weight g
218737	240 × 145 × 145	9	850



Dönges Stretcher DIN 13024

Stretcher DIN 13024 in two different versions: single or double folding. Upholstered with sturdy synthetic fibrefabric to make cleaning and disinfecting easy. Ideal for decontamination institutions.

Ord. no.	Variant	Dimension folded mm	Weight g
253504	N (1-fold foldable)	1.920 × 150 × 145	8000
253502	K (2-fold foldable)	1.040 × 180 × 145	9700

Features:

- Lightweight but extremely resilient: the frame made of robust light metal square profile offers maximum stability with minimum weight - ideal for quick use.
- Quickly ready for use: Chest and foot straps with quick-release fasteners ensure secure fastening in seconds.
- Space-saving and practical: retractable carrying handles enable compact storage and convenient handling.
- Tested and standardised: Complies with DIN 13024 - Confidence through certified quality.



similar image



similar image



similar image

Technical data:

Standards:	DIN 13024
Load capacity:	150 kg



Dönges disposable carrying sling EN 1865

The disposable rescue sling (rescue cloth/carrying sling) is an important aid during emergencies. The stable woven tarpaulin is also reinforced with straps in order to maximise the load-bearing capacity of the sling. This sling is EN 1865 certified and therefore also approved for rescuing and recovering patients. Simple wraps must not be used as carrying aids.

Technical data:

Load capacity: 150 kg
Standards: EN 1865



Features:

- The high-quality rescue sheet enables uncomplicated rescue and recovery even in places that are difficult to reach with rescue stretchers.
- The sling is also suitable for animals such as dogs, allowing them to be transported safely after anaesthesia or similar procedures.
- Thanks to the foldable material, the stretcher can be stored in a space-saving manner, meaning it fits in a backpack or bag and is also suitable for taking on hikes.
- The sturdy fabric tarpaulin is reinforced with straps to achieve optimum load-bearing capacity, while the double-stitched edges ensure long durability.
- Specifications: Fabric tarpaulin with webbing handles | Dimensions: 185 × 57 cm | Weight: 740 g | Colour: white | Load capacity: up to 150 kg



Ord. no.	Material	Color	Dimensions cm	Weight g
253505	sturdy fabric tarpaulin with additional reinforcements	white	185 × 57	740

Dönges Fire brigade first aid kit DIN 14142:2025-03 in FireBox

First aid materials in accordance with DIN 14142:2018-09 in Dönges Firebox in accordance with DIN 14880-4-LM (400 × 300 × 150 mm) with partitioning and "Verbandkasten DIN 14142" lettering with individual description on request.

Ord. no.	Dimension L x W x H mm	Weight g
218500	400 × 300 × 150	5356



Scope of delivery:

- 3 pieces Bandage cloth 60 × 80 cm
- 2 pieces Bandage packet, small
- 6 pieces Bandage pack, medium
- 4 pieces Bandage packet, large
- 10 pieces Fixation bandage 4 m × 6 cm
- 10 pieces Fixation bandage 4 m × 8 cm
- 12 pieces Wound compresses, 2 pcs. each, 10 × 10 cm
- 2 pieces Eye compresses 5 × 7 cm
- 12 pieces Elastic finger bandage
- 1 pieces Resuscitator
- 1 pieces Splinter tweezers
- 2 pieces Instant cold compress, small
- 1 pieces Hand cleansing wipes, 10 pieces each
- 12 pieces Elastic fingertip bandage
- 2 pieces Adhesive plaster roll 5 m 2.5 cm
- 4 pieces Silver-gold rescue blanket, 210 × 160 cm
- 4 pieces Triangular scarf, 96 × 96 × 136 cm
- 2 pieces Scissors with bent knees
- 3 pieces Vinyl glove set, 4 pieces each
- 2 pieces Mini grip bag 300 × 400 mm
- 1 pieces Universal bandage 5 m × 8 cm
- 36 pieces plaster strips
- 24 pieces Elastic plaster wound dressing, 10 × 6 cm
- 1 pieces First Aid Instructions
- 1 pieces emergency care certificate
- 6 pieces Face mask





- Scope of delivery:**
- 1 pieces Dönges SEG backpack
 - 1 pieces Inside pocket blue
 - 1 pieces Inside pocket green
 - 1 pieces Inside pocket red
 - 1 pieces Inside pocket yellow
 - 1 pieces Filling according to DIN 14142

Features:

- Particularly robust material
- Extremely durable processing
- Ergonomic design
- Highly visible thanks to reflectors

Dönges Emergency backpack SEG with inner pockets and filling according to DIN 14

The contents of the firefighters first aid kit according to DIN 14142-K stowed in the Dönges SEG backpack. Ideal when only a little space is available. Inside pockets of various sizes can be velcroed into the body (four inside pockets are included!). In the lid is space for documentation and small material. Even an ampullarium for up to 12 ampoules is incorporated. Outside on the front is a Velcro strip for attaching a reflective sign with individual printing. The backpack is made of extremely robust and wipeable tarpaulin material. Ergonomically shaped and processed with great attention to detail, it is the ideal companion for firefighters and ambulance services.



Ord. no.	Material	Dimension L x W x H mm	Weight g
201480	Tarpaulin	190 × 360 × 420	3320






 dönges

Losberger Jumping cushion 16 DIN 14151

The jumping cushion is an inflatable jumping device that is meant to save people from buildings with a maximum height of 16 metres. The cubic frame is covered with high-strength and hardly inflammable tissue. The framework can be filled with a compressed air bottle and erects by itself. When a body hits the cushion the energy of the movement gets absorbed through deformation. After the saved person has left the cushion, it erects again and is ready for the next jump within 30 seconds.

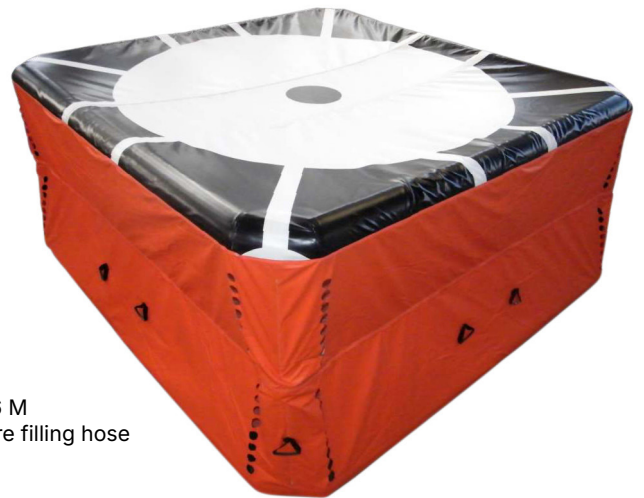

Technical data:

max. rescue height: 16 m
Distance between two jumps: 20 Sec.
Set-up time: approx. 30 Sec.
Pack size: 90 × 55 × 50 cm
Operating pressure: 0,50 bar
Temperature range: -26 to +50 °C

Scope of delivery:

1 pieces Jump pad 16 M
1 pieces High pressure filling hose
1 pieces Packing bag

Features:

- Fast rescue of people from great heights
- Ready for use in only 30 seconds
- Equipped with handles for easy repositioning




Ord. no.	Dimensions cm	Weight g
200083	350 × 350 × 170	37000



Features:

- Accessories can be conveniently stored on the suction cup
- Storz C-coupling for the pump-off hose
- Large wheels with parking brake for high mobility
- Overflow protection
- Robust and impact resistant plastic
- Integrated personal protection switch
- Completely drainable via drain hose
- Numerous reflective strips for more safety

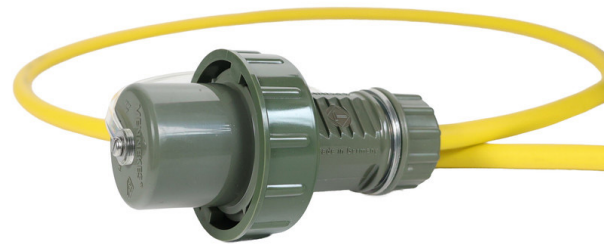

Dönges Fire Department Vacuum, Dönges Hero FPS, with a 10-meter connection hose and PRCD

This modern professional vacuum cleaner with integrated pump is especially designed for fire brigades and civil defense units and is suitable for continuous operation in case of floods. Contaminated waste water, sludge, stones, and other non-flammable solids and suspended matter can be efficiently vacuumed and pumped out at the same time.

The focus is clearly on maximum safety and performance. The Heros has an IP68 plug, a PRCD personal protection switch and an IP54 socket as standard.

The impact-resistant and compact plastic container enables optimum mobility with a low total weight of only 19 kg. Further standard equipment such as the separately switchable pump, solid rubberized wheels with practical parking brakes and the fire brigade compliant Storz clutch guarantee a reliable partner at your side.



Technical data:

Power consumption:	2.200 W
Suction power:	150 l/min
Pumping capacity:	230 l/min
Volume flow:	max. 70 l/s
Negative pressure:	max. 230 mbar
Connection cable:	10 m H07RN-F3×1.5 with
Schuko plug IP68	
Container volume:	max. 45 l gross
Suction height max.:	in full suction mode max. 2.3
m, slurping mode max.	5-8 m
Head:	from suction max. 9 m
Conveying distance:	max. 50 m
Height with handle:	93 cm
Grain outlet:	34 mm

Scope of delivery:

1 pieces	Sucker Hero FPS
2 pieces	Stainless steel suction tube, 50 cm
1 pieces	Metal floor nozzle, 45 cm
1 pieces	Joint nozzle
1 pieces	Filter mesh
1 pieces	Suction hose, 7 m
1 pieces	Dirty water hose, 10 m



Ord. no.	Dimension W x H x D cm	Weight g
218650	44 × 77 × 50	19000



Dönges Emergency pump set

Time and time again, fuel or other hazardous substances have to be pumped out or pumped into another container during operations to protect the emergency services or the environment. This can be done using this compressed air double diaphragm pump, which is safely stowed away in the Dönges Firebox together with all of the necessary accessories.

The pump is safely and reliably operated using a 200 or 300 bar breathing air cylinder, a compressor or the vehicle compressed air connection. With a capacity of 25 l/min., this pump is sufficient for the majority of operations.

Ord. no. Dimension L x W x H mm

Weight g

221380 600 × 400 × 150

12880



Features:

- Cast Aluminum Air Double Diaphragm Pump
- Very robust and still very light (2.1 kg)
- Flexible field of application
- Limited resistance to alkalis and acids
- 200-300 l pumping capacity with one breathing air cylinder
- Completely ready for use stowed in Dönges Firebox size 3


Scope of delivery:

1 pieces	Compressed air double diaphragm pump
1 pieces	Pressure hose 1/2 inch, 2 m long
1 pieces	Car suction hose, 10 mm, 1.5 m long
1 pieces	Suction hose 3/4 inch, 2 m long, with strainer
2 pieces	Grounding cable with cable lug and contact pliers, 2 m long
7 meters	Spiral compressed air hose
1 pieces	Pressure reducer 300 bar
1 pieces	Adapter for truck compressed air connection
1 pieces	Dönges Firebox size 3

Löschigel BlazeX

The BlazeX is a cylindrical hose attachment with atomizer nozzles. It is mounted on a short plug-in ladder piece, a plug-in part. Thanks to the additional castors, the BlazeX can be easily moved. The complete product can be placed on an extendable plug-in ladder and thus pushed into a burning building from a safe distance. The fire is effectively fought from the inside without the need for firefighters to enter the building and thus put themselves in great danger.

The BlazeX offers, with easy and intuitive handling, a way to avoid entering hazardous areas. Instead of a task force, the BlazeX attached to a plug-in ladder can simply be pushed forward. The safety distance and thus the safety of the firefighters is significantly increased. The BlazeX is particularly useful for industrial fires or the precipitation of gases and aerosols, such as chlorine gas.

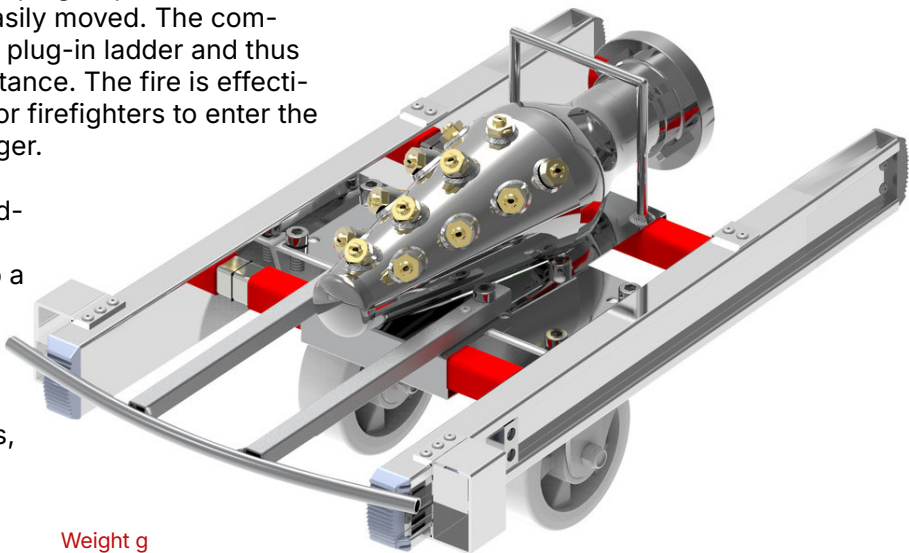

Ord. no.	Dimensions W x D x H mm	Model	Weight g
201905	900 × 500 × 400	Standard	8000



Technical data:	
max. pressure:	16 bar
Max. flow rate:	550 l/min
Throwing distance:	13 m
Spray width:	13 m

Features:

- Sturdy stainless steel construction
- 12 interchangeable nozzles (1x full cone nozzle, 3x full jet nozzle, 8x flat jet nozzle)
- Easy one-man operation due to rollers
- Flow rates: 320 l/min. @ 5 bar, 375 l/min. @ 7 bar, 450 l/min. @ 10 bar





Features:

- Individually combinable thanks to screw connections between all components
- Especially solid, 34 mm shaft diameter
- Lances completely made of stainless steel
- Each lance is equipped with a Storz-C coupling and shut-off
- Tool-free assembly of the components

Dönges Fog extinguishing system FOG-X

The new FOG-X fog extinguishing system offers a number of major advantages over conventional systems. The principle of extinguishing with fine water mist is well-known and has been successfully applied and trained in practice for many years. The fine atomisation of the extinguishing water results in very fine water droplets in the discharge cone. This creates a very large surface area. The finest droplets can thus absorb an enormous amount of heat energy from the combustion chamber in a short period of time.

Parallel to the cooling effect, a cooling of adjacent flammable surfaces is achieved at the same time. This minimizes the risk of the formation of flammable and highly toxic gases. This effect can also be used for self-protection or to prevent the spread of fire. The fog wall is excellently suited for sealing off radiant heat. This prevents the spread of fire in rooms, shafts, ventilation systems, false ceilings, silos, etc.

In addition to the cooling effect, a smothering effect occurs with the FOG-X extinguishing lances due to the abrupt evaporation of the fine spray mist. One litre of water evaporates to approx. 1,700 litres of water vapour. The sudden amount of water vapour displaces the oxygen in the combustion chamber, which is referred to as smothering in the theory of fire. The oxygen demand of a fire permanently extracts oxygen from the air in the fire chamber. The persistent cooling effect of the fine spray mist then causes the fire to extinguish.

The decisive difference between the FOG-X fog extinguishing system and conventional systems is that the various modules such as extinguishing lances, extensions and retractors can be combined in almost any combination, depending on the application. Various scenarios such as room fires, roof truss fires, silo fires, wood chip storage fires, forest fires (soil humidification) can be combated very quickly and with little water input. The FOG-X extinguishing lances require only small amounts of water. Depending on the version and operating pressure, the water consumption is between 60-80 l/min.

The set is supplied in a practical FireBox, the individual components can be stored in the precisely fitting foam insert, clearly arranged and always ready to hand. The foam also offers space to store additional reflectors.



Scope of delivery:

Set Basic:

- 3 pieces FOG-X extinguishing lances
- 1 pieces FOG-X Retractor 60°
- 1 pieces FOG-X Retractor 80°
- 1 pieces FOG-X Retractor 100°
- 1 pieces Dönges FireBox size 1 with foam insert

Set Extension:

- 2 pieces FOG-X extinguishing lances
- 1 pieces FOG-X Retractor 60°
- 1 pieces FOG-X Retractor 100°
- 1 pieces FOG-X extension
- 1 pieces Dönges FireBox size 1 with foam insert

Ord. no.	Model	Dimension L x W x H mm	Weight g
200819	Set Basic	600 × 400 × 210	15500
200825	Set Extension	600 × 400 × 210	15150

Features:

- Effective protection against smoke and heat spread
- Quick and easy installation thanks to robust telescopic tensioning rod
- Suitable for door widths from 70 to 115 cm
- Heat-resistant special fabric
- Space-saving storage in a durable carrying bag
- Easy attachment to the hose carrying basket for convenient transport



Dönges Smoke Defender smoke protection curtain

The Dönges Smoke Defender is an indispensable tool for the fire service to prevent the spread of smoke and heat in buildings. This mobile smoke protection curtain is attached to door openings and ensures that escape and rescue routes remain largely smoke-free.

Made of high-temperature-resistant material, the Smoke Defender can withstand even extreme conditions. The robust telescopic tensioning rod enables quick and easy installation in the door frame. Thanks to its well-thought-out design, the smoke protection curtain is also suitable for intensive use by fire brigades.

After use, the smoke protection curtain can be stowed away in the accompanying transport bag to save space. The bag is equipped with practical fastening loops so that the curtain can be transported securely on the hose carrier basket.

Technical data:

Bag dimensions W x H: 76 × 53 mm

Ord. no.	Model cm	Dimensions L cm	Weight g
202704	70 - 115	190	4750




Dönges hose carrying cage

The hose carrying cage according to DIN 14827, is standard equipment on many fire trucks. Our hose carrying cages are made of aluminum and comply with the standard DIN 14827.

One side wall can be opened for easy loading of the tubes. Two Velcro straps close the side wall. A third Velcro fixes the coupling of the tube at the basket. The hose carrying baskets are suitable for 3 pieces of 15 m C-hoses (diameter 52 mm) or 2 pieces of 20 m length B-hoses (diameter 75 mm).



Ord. no.	Standards	Model	Dimensions mm	Weight g
215290	DIN 14827	3 x C hose	870 x 115 x 520	3700
215295	DIN 14827	2 x B hose	870 x 145 x 520	5300

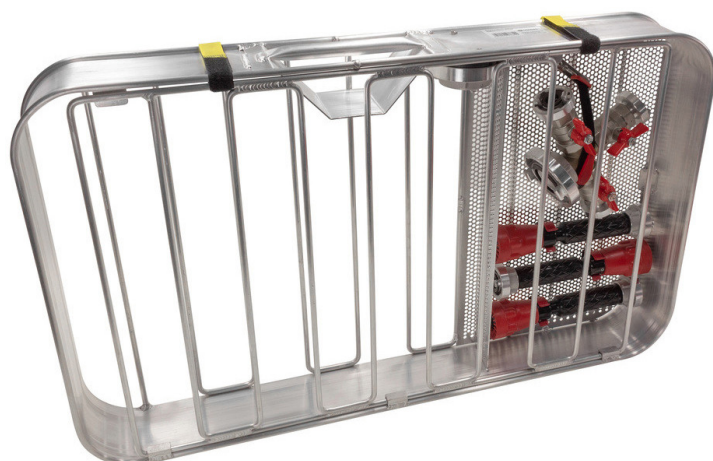

Dönges wildfire basket Wakob HS7

In the Wakob forest fire basket the equipment is clearly arranged and within easy reach. The equipment can be easily transported the last few metres to the site of operation. The external dimensions of the Wakob are identical to the DIN hose basket C.

Ord. no.	Model	Dimensions mm	Weight g
201629	With fittings	870 x 115 x 520	9000

Features:

- Identical dimension to hose basket C according to DIN 14827
- Practical transport of the equipment
- Particularly light
- Fully equipped with fittings (without hoses)
- One side folds out

Technical data:

Standards: similar to DIN 14827

Scope of delivery:

- 1 pieces Carrying basket "Wakob" with equipment holders
- 3 pieces AWG jet pipe HS7
- 1 pieces Distributor C-DDD
- 1 pieces Transition piece C-D (without fig.)





Dönges Rubber hose bridge

The Dönges rubber hose bridge impresses with its exceptional durability and user-friendliness. Whether on uneven terrain or in high-traffic areas, this hose bridge provides optimal protection for your hoses and cables. The smart design with integrated knobs ensures that connected bridges remain securely in place. With a width of just 300 mm, it deviates from DIN 14820 but offers clear advantages: its perfect for tight spaces such as narrow sidewalks or road sections, and its modular system allows flexible and space-saving use by connecting multiple bridges. Made from high-quality solid rubber, the bridge can be set up in seconds and easily adapts to challenging surfaces thanks to its elastic axis. A well-thought-out, durable product, ideal for construction sites, events, and emergency operations.



Features:

- From black solid rubber
- Reflective stripes on the sides
- Tested up to 40 t overrun load
- Protection for hoses and cables
- Adapts to uneven ground
- 300mm wide
- Interlocking connecting parts serve as carrying handles



Ord. no.	Type	For hoses	Dimension L x W mm	Weight g
211711	B	2 x B, C or D	860 x 300	11151
211712	A	2 x A, B, C or D	1.000 x 300	11300


Dönges Exercise mannequin Crash Kevin

Particularly heavy-duty training doll with many practical functions. Many customer requests and practical details have been implemented in the new training doll in order to improve the durability and application possibilities of the puppet.

A very robust nylon material is used, which is even stitched with double layers at the ends of the arms and legs to further increase durability. Loops have been sewn onto the legs to attach shoes, so the doll's material is better protected when dragged across the floor.

The head of the dummy is a separate compartment with its own zipper. For exercises with the thermal imaging camera, for example, a hot water bottle can be well positioned. Fluffy surfaces and the clear pocket on the chest allow easy identification.

The doll can be filled with various materials (max. 50 kg).

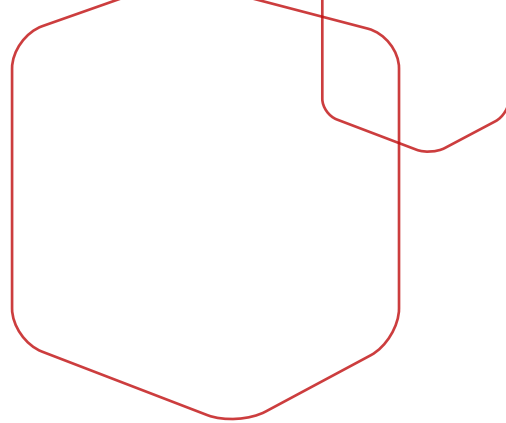

Features:

- Robust material for hardest use
- Darts inside for better distribution of the filling materials
- Clear pocket in the chest area
- Self-filling, thus variable in weight design and easy to store and transport
- Head with separate compartment and zipper (e.g. for hot water bottle)
- Arm and leg ends double stitched
- Loops for belts and shoes
- Fleece areas on chest and back




Ord. no.	Model	Volume l	Weight g
220850	Adult approx. 180 cm	70 - 75	680
220855	Youth approx. 110 cm	40 - 45	400
220860	Baby ca. 70 cm	25 - 30	260

Delivery does not include filling

Dönges McLeod-tool with NUPLA fibreglass handle

Sturdy special tool for making fire breaks in the forest floor. The sharp hoe at one side cuts through roots, and the rake will dig effortlessly into dry and hard ground.

Ord. no.	Length cm	Weight g
210487	122	2390

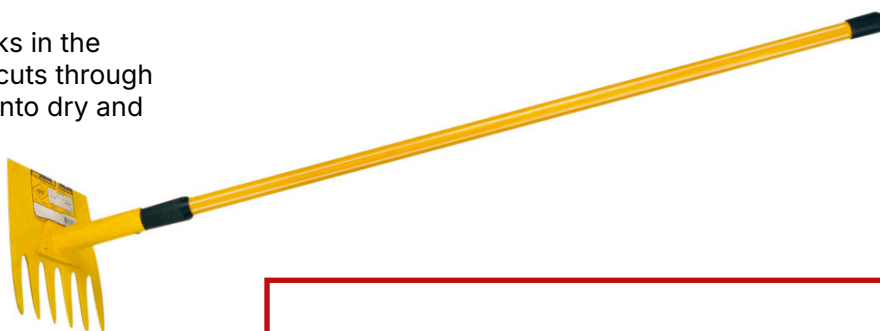

Features:

- Light as a feather and yet enormously stable
- On the one hand hoes, on the other hand rakes
- Very good price-performance ratio



Dönges Axe Pulaski with hickory handle

The Pulaski axe was developed for firefighting and forest fire management. With its double edge - a combination of axe blade and shovel - it is ideal for digging, clearing and chopping. Whether in the garden, camping or in the wilderness, this axe performs a wide variety of tasks effortlessly.

The axe blade is made of hardened steel and is precision-ground to ensure long-lasting sharpness. The hickory wood handle, known for its shock-absorbing capabilities and strength, ensures comfortable handling and minimises fatigue.

The handle is ergonomically shaped and offers a comfortable hand position, making work efficient and less stressful. The right balance between head and handle enables precise control and accurate cuts.

Both the axe blade and the hickory handle have been carefully selected and processed to ensure long-lasting durability.



Features:

- Versatile
- High quality materials
- Precise handling

Ord. no.	Weight g
202273	1600



Dönges Forest Fire Hoe Durango

The Durango forest fire hoe is an indispensable tool for use in forest fires. Its robust design and high-quality material make it a reliable companion in challenging situations. The Durango was specially developed to be used effectively and efficiently when fighting forest fires. With its sophisticated design, it enables precise handling and facilitates work in difficult terrain. Due to the different widths the Durango can be used in loose soil, but also in harder ground conditions. It is particularly suitable for creating wound strips and for clearing work.

This type of hoe has been used in the USA for a long time and is part of the standard equipment of hot tilling companies specialising in vegetation fires.

Scope of delivery:

1 pieces Forest Fire Hoe Durango

Ord. no.	Length mm	Dimension sheet mm	Weight g
202313	1.330	150 × 230	1850




Dönges Forest Fire Patch

With 10 fans, each 50 mm wide, 330 mm long, made from spring steel, head made from galvanised sheet steel.

ATTENTION: Handle must be ordered separately!

Ord. no.	Dimension W x H x D mm	Weight g
210812	390 × 400 × 480	1300

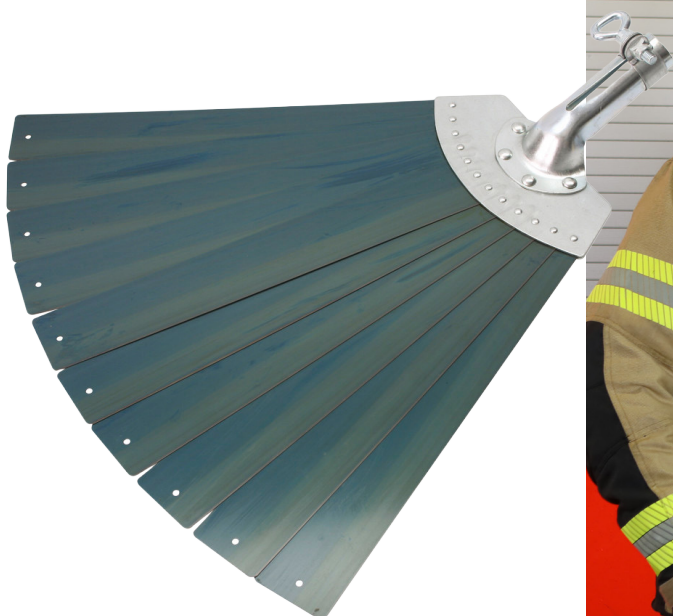

Dönges Forest fire tool Gorgui V2 by Vallfirest

The Gorgui multifunctional tool has been used in forest fires around the world for many years. Vallfirest has developed the second generation and further improved the Gorgui. The V2 is characterised by better balance and durability thanks to more robust materials.

The function of the McLeod was given a larger working surface to increase the working performance. The use of the McLeod as a hoe is now more clearly demarcated.

The working surface of the Pulaski hoe has also been improved in order to work more effectively. However, the balance has been particularly revised, making it easier to switch between the different functions. The angle of the Pulaski has been adjusted for rocky terrain.

The material of the rake has been further hardened. The handle is now made of stronger material and its ergonomics have been adapted to the latest US Forest Service standards.



Features:


- Proven and in use worldwide
- Improved balance and stability
- Combines four tools in one: McLeod, Pulaski, rake and hoe
- Adapted to the latest standards of the US Forest Service



Technical data:

Size tool head:
Stem length:
Material thickness:
Material 1:
Material 2:
Diameter Ø:

335 × 185 mm
125 cm
4 mm
HARDOX 500 steel
Eucalyptus wood
31 mm

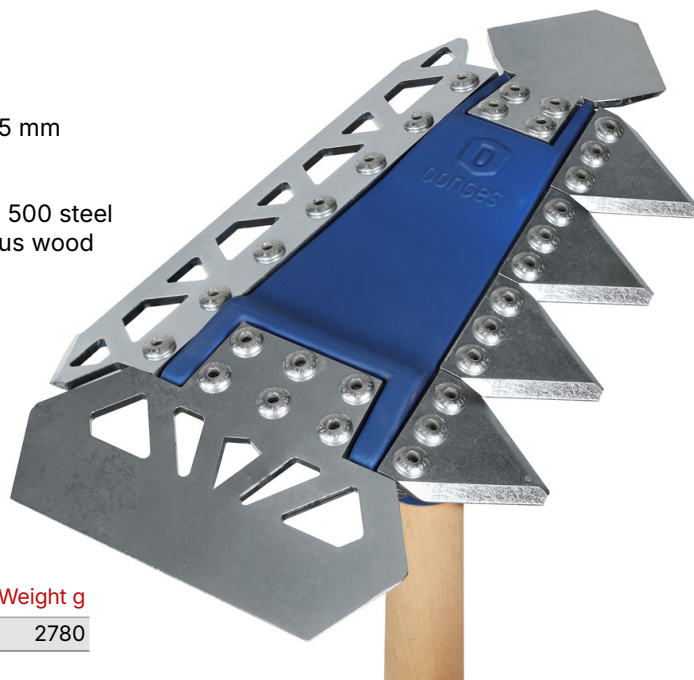

Ord. no. Item

Weight g

202408 Dönges Forest fire tool Gorgui V2 by Vallfirest VALPDGGBP

2780

Dönges Shovel cover for wildfires


With the shovel cover, a commercially available shovel turns into a full-fledged wildfire beater. The hard-wearing and flame retardant material guarantees a long service life.

The shovel cover can be rolled up or folded and easily stored in the smallest of spaces when not in use.



Technical data:

Material: PVC/PES

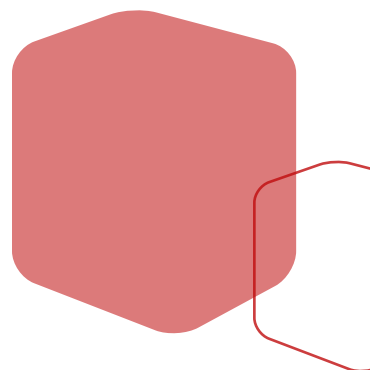

Features:

- Flame retardant material
- Is simply pulled over the shovel blade and fixed with hook and loop fasteners
- Takes no space while stored
- Shovel not included in delivery

Note: due to the material, the patch may only come into contact with the fire material/flames for a short time (contact heat)



Ord. no. Item

Weight g

201524 Dönges Shovel cover for wildfires

500

Features:

- Set up in less than 45 seconds
- Reusable due to exchange of the inner film
- Suitable for drinking water thanks to an optional drinking water-grade inner liner
- Filling from the top (filling neck diameter 58 cm) or via the bottom valve
- Forklift eyelets for easy transport
- Four carrying straps and four pockets for holding square or round timber
- Easy to transport: up to 10 containers per pallet
- Flexible positioning without structural modifications: Quick to set up, removes without leaving residue
- Can also be used as a mobile vehicle barrier: Ideal for events, markets, and temporary security zones

Technical data:

Departure:	IBC S 75 * 6
Material outer skin:	Polypropylene
Side panel material:	Polyurethane foam
Inliner material:	LDPE
Pack size:	1.100 × 1.000 × 100 mm
Filled diameter:	1.117 mm
Max. filling temperature:	80 °C
Filling time using a B-hose:	2 min
Filling time using a C-hose:	3 min



Dönges Multi-Flex container 1,100 l

The Multi-Flex container is a foldable, reusable container made of a very robust outer skin and an inner film - ideal for fire departments, disaster control, THW or law enforcement agencies.

Whether firefighting water transport, forest fire operation, as a salvage container for damaged products or for fire water retention - the Multi-Flex container convinces with its versatility. The container can also be used as a retention container for decontamination scenarios, storm protection as a ballast tank or also as a nonlocal terror barrier, as well as a flexible flood protection.

Scope of delivery:

1 pieces Multi-Flex container
1 pieces Inner foil LDPE

Ord. no.	Volume l	Dimensions mm	Weight g
201993	1.100	1.100 × 1.100 × 1.050	8000



Dönges Multi-Flex Container 700 l

Dönges Multi-Flex Container – The Flexible Solution for Transport, Storage, and Protection

The Dönges Multi-Flex Container is the ideal solution for storing, transporting, or collecting water and other liquids. This foldable container system combines the advantages of rigid IBC containers with the flexibility of mobile solutions.

Thanks to the double-layer fabric filled with polyurethane foam, the side walls offer high stability. The container base adapts perfectly to the ground surface, making it particularly suitable for rough terrain.

Mobility and Space-Saving Storage

Every Dönges Multi-Flex container is equipped with sturdy lifting eyes, allowing it to be easily transported by forklift or airlift. When folded, the container's height is reduced to one-tenth—enabling up to ten containers to be stored or transported on a single pallet.

Sophisticated technology in detail

A central bottom discharge opening with a standardized industrial thread enables controlled emptying. The chemical-resistant inner liner is replaceable and can be combined with various accessories. Thanks to modular components, a wide range of applications is possible.

The 700-liter Dönges Multi-Flex container – The compact container for a wide range of applications

The 700-liter Dönges Multi-Flex container is suitable for storing water used to extinguish forest fires or for watering municipal green spaces. In the event of an accident, it can be used to contain and safely dispose of spilled liquids. For flood protection, multiple containers can be connected using square or round timbers and, if necessary, reinforced with plastic sheeting.



Features:

- Set up in less than 45 seconds
- Reusable due to exchange of the inner film
- Filling from the top (filling neck diameter 58 cm) or via the bottom valve
- Forklift eyelets for easy transport
- Four carrying straps and four pockets for holding square or round timber
- Easy to transport: up to 10 containers per pallet
- Flexible positioning without structural modifications: Quick to set up, removes without leaving residue

Technical data:

Departure:	IBC S 75 * 6
Material outer skin:	Polypropylene
Side panel material:	Polyurethane foam
Inliner material:	LDPE
Pack size:	1.100 × 800 × 100 mm
Filled diameter:	1.117 mm
Max. filling temperature:	80 °C
Filling time using a B-hose:	1 min
Filling time using a C-hose:	2 min



Ord. no.	Volume l	Dimensions mm	Weight g
202274	700	1.000 × 1.000 × 800	7000

Scope of delivery:


- 1 pieces Multi-Flex container
- 1 pieces Inner foil LDPE

Dönges C-DCD Distributor for Wildland Fires

The Dönges wildland fire distributor ensures a fast and flexible water supply in the field.

The Storz C inlet feeds in the extinguishing water and spreads it across three outlets - two Storz D outlets and one centered Storz C outlet. This allows both smaller hoses for firefighting and a powerful C hose to be used without any significant loss of flow. The neon yellow color of the distributor maximizes its visibility in the field.

Shut-off is achieved via smooth-running ball valves, which enable the outlets to be opened and closed quickly.

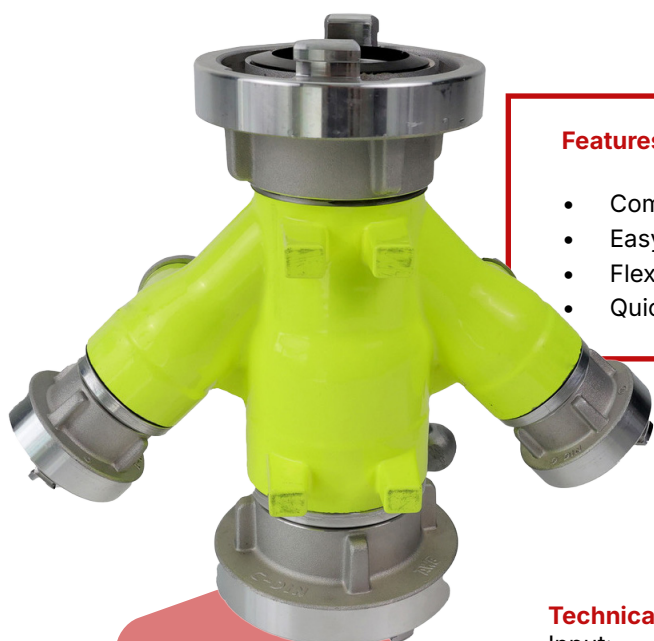

Features:

- Compact design ideal for use in rough terrain
- Easy handling thanks to ergonomic ball valves
- Flexible: spreads the extinguishing water across two D pipes and one C pipe
- Quick coupling via standardized Storz connections

Technical data:

Input:

Storz C

Output:

1 x Storz C, 2 x Storz D



Ord. no.	Dimensions L x W x H mm	Weight g
202884	225 x 250 x 133	2100



Dönges Fire Bucket "Bodega", foldable, PVC, 15 litres

The Dönges fire bucket "Bodega" is a practical and reliable tool for firefighting and other applications. With a capacity of 15 liters, the foldable PVC bucket offers a robust and durable solution. The bucket is particularly space-saving and easy to store. The resistant material makes it easy to clean and versatile. Ideal for use in forestry, firefighting, or for private use.



Features:

- Foldable extinguisher bucket with 15 litre capacity
- Made from robust and durable PVC material
- Space-saving design, easy to stow away
- Versatile and easy to clean
- Ideal for fire brigades, forestry and private applications

Ord. no. Volume I

202306 15

Scope of delivery:

1 pieces Dönges fire bucket "Bodega", foldable, 15 liters



Ord. no.	Volume I	Dimensions mm	Weight g
202345	20	620 × 480 × 50	2500



Features:

- Ergonomic design with padded shoulder straps and adjustable chest strap
- Easy and quick filling thanks to the innovative valve system
- Metal connection for increased durability, tightness, and stability
- Material: High-strength polyethylene, Empty weight: 2.4 kg
- Capacity: 20 liters, Dimensions: 55 cm x 34 cm x 15 cm
- Reflective elements for improved visibility and safety



Dönges Firefighting backpack

The Dönges firefighter backpack by Vallfirest is specifically designed for combating forest and vegetation fires. Its ergonomic design with padded shoulder straps and an adjustable chest strap ensures high carrying comfort, even during long operations. Thanks to the innovative valve system, the backpack can be quickly and easily filled, allowing for controlled water streams for effective firefighting.

New in the updated model is the metal connection between the backpack and the double-action pump, offering several advantages. This innovative connection enhances the product's durability and reliability, as it is particularly resistant to wear and damage. Additionally, the improved seal reduces the risk of leaks. The increased stability significantly facilitates handling and operation, leading to an overall more pleasant user experience.

Made of high-strength polyethylene, the empty backpack weighs only 2.4 kg and holds 20 liters. Its dimensions of 55 cm x 34 cm x 15 cm provide exceptional mobility, especially in hard-to-reach areas. Reflective elements improve visibility and increase personnel safety.

Scope of delivery:

- 1 pieces Dönges firefighter backpack from Vallfirest
- 1 pieces Double-action pump with metal connection
- 1 pieces Instruction manual



Stubai Load carrier up to 35 kg load

The Stubai load carrier is the ideal tool for transporting items over rough terrain. It features a sturdy, powder-coated aluminum frame with a low weight and offers exceptional comfort thanks to a backpack carrying system. The well-padded straps and wide hip belt ensure comfortable carrying even at the maximum load capacity of 35 kg. The dimensions are 680 × 370 × 200 mm.


Features:

- Sturdy, powder-coated aluminium frame with low dead weight
- Extra comfort thanks to backpack carrying system
- Well padded straps and wide hip belt
- Delivery without load, only the heavy-duty backpack is supplied

Technical data:

Max. load: 35 kg
Dimensions: 680 × 370 × 200 mm

Ord. no.	Item	Weight g
139550	Stubai Load carrier up to 35 kg load	1600

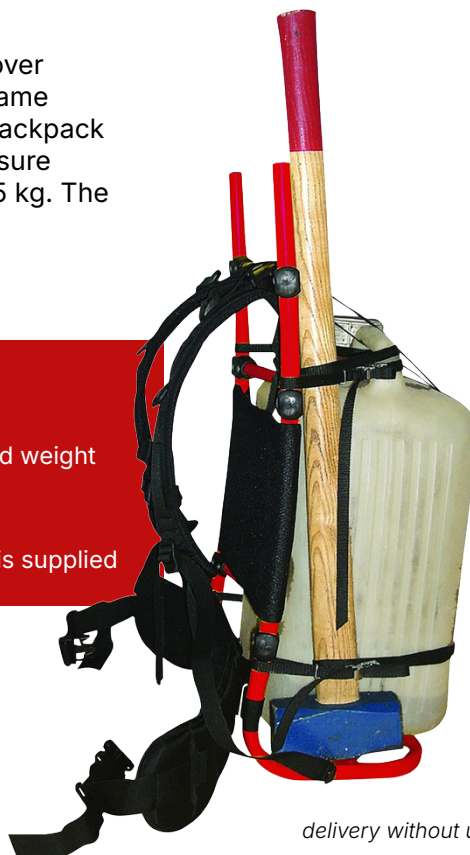

delivery without unloading

Features:

- Offers plenty of space for material
- Simple attachment of the add-on module
- Made of robust tarpaulin material
- Easy to clean
- Space for 4 D-hoses or 3 C-hoses



Technical data:

Dimensions: 680 × 370 × 200 mm

Ord. no.	Variant	Weight g
201970	Attack C + D	400

Scope of delivery:

1 pieces Backpack module "Attack C + D"
(Load carrier not included in delivery)

Dönges Transport module for load carrier

Particularly in heavily forested areas or on slopes, the scene of the fire can often only be reached on foot, as the emergency vehicles cannot leave the forest roads. Whether hoses, tanks, pumps or tools - the equipment still has to get from the emergency vehicle to the fire. Depending on the distance and equipment, this is a real back-breaking job in which the rescue forces appreciate every bit of help. With the Forest Fire Backpack module, all equipment gets to where it's needed quickly and with minimum effort. The bag is made of robust tarpaulin material and offers space for all kinds of material and equipment.

delivery without unloading



delivery without unloading



FOL-DA-TANK Frame Tank double fold

Features:

- Robust aluminum frame construction
- Folds up to save a lot of space
- Large capacity in various sizes
- Quick setup
- Versatile application



Ord. no.	Volume l	Model	Dimensions L x W x H cm	Weight g
202266	3.800	Without flange	240 × 240 × 74	43100
202486	2.300	Without flange	180 × 180 × 74	31750
202487	2.300	incl. A-110 Storz flange	180 × 180 × 74	31750
202389	3.800	incl. A-110 Storz flange	240 × 240 × 74	47630
202267	5.700	Without flange	300 × 300 × 74	49900
202390	5.700	incl. A-110 Storz flange	300 × 300 × 74	54430
202268	8.000	Without flange	340 × 340 × 74	56700
202391	8.000	incl. A-110 Storz flange	340 × 340 × 74	61230
202269	9.500	Without flange	370 × 370 × 74	59000
202392	9.500	incl. A-110 Storz flange	370 × 370 × 74	63530
202301	11.300	Without flange	400 × 400 × 74	61200
202393	11.300	incl. A-110 Storz flange	400 × 400 × 74	65730
203016	13.250	Without flange	420 × 420 × 74	83915
203017	13.250	incl. A-110 Storz flange	420 × 420 × 74	88445
202379	15.200	Without flange	460 × 460 × 74	83915
202394	15.200	incl. A-110 Storz flange	460 × 460 × 74	88450
202484	19.000	Without flange	520 × 520 × 74	99790
202485	19.000	incl. A-110 Storz flange	520 × 520 × 74	104320

Technical data:

Grammage vinyl:	800 g/m ² ,
Basis weight HPR:	630 g/m ² ,
Packing size L x W x H:	130 - 270 x 41 x 74 cm

FOL-DA-TANK Water bladder for process water

The Water Bladder for Non-Potable Water - A Versatile and Reliable Solution

The water bladder for non-potable water is a versatile product that is ideal for various applications. It has been designed to meet the demands of remote areas and bushfire suppression. This water bladder features a range of characteristics that make it a reliable and practical solution.

Made from high-quality vinyl, this water bladder is not only lightweight and compact but also highly resistant to chemical contamination, mold, rot, and the extreme heat of the sun. The RF-welded seams ensure long-lasting durability and reliable performance, even under extreme conditions down to -40°C.

Filling and emptying the water bladder is extremely simple and time-efficient. It can be operated using either a pump or gravity, enabling a rapid response in emergencies. Its lightweight design allows for easy handling by a single person, making deployment even more efficient and flexible.

The water bladder is equipped with a 40mm ball valve with an internal thread, providing precise control over water flow. Additionally, the large filling opening with a 100mm diameter ensures user-friendly operation. Overall, the water bladder for non-potable water is a reliable and versatile product, making it perfect for fire-fighting in remote areas and bushfire suppression. With its durable materials and user-friendly features, it is a valuable addition to any emergency equipment.



Features:

- Compact and easy to store
- Resistant to chemical contamination, mold, rot and solar heat
- RF-welded seams for longer service life
- Weather-resistant down to -40° C

Technical data:

Material: Vinyl
Color: Orange
Basis weight: 800 g/m^2,

Ord. no.	Volume l	Dimension L x W x H cm	Weight g
202284	300	110 × 140 × 23	7300
202805	40.000	640 × 700 × 91	130000
202483	400	140 × 150 × 41	8600
202482	4.300	370 × 200 × 60	26000
202481	4.800	290 × 380 × 46	27000
202480	5.000	430 × 200 × 60	29000
202758	57.000	820 × 670 × 92	194000
202479	5.700	460 × 290 × 60	31000
202283	600	150 × 150 × 30	9100
202759	76.000	1.000 × 760 × 107	259000
202478	7.600	320 × 370 × 60	37000
202477	9.500	390 × 430 × 60	44000
202468	900	150 × 210 × 35	10400
202467	100	60 × 90 × 20	4500
202469	1.000	200 × 180 × 41	11300
202470	11.400	360 × 430 × 70	47000
202471	1.100	170 × 210 × 35	13600
202472	15.200	550 × 430 × 90	55000
202473	19.000	430 × 550 × 90	64000
202474	200	91 × 130 × 23	6400
202475	2.000	250 × 170 × 46	15000
202760	22.750	640 × 550 × 76	75000
202761	28.500	610 × 610 × 76	105000
202476	3.000	300 × 180 × 60	19000

Features:

- Folds up to save a lot of space
- Simple assembly by one person
- Ethafoam collar - no inflation required
- All seams welded for longer service life
- Storage bag included



FOL-DA-TANK Self-erecting folding container incl. A-110 Storz

The self-erecting, frameless portable water tank was developed to meet the most stringent requirements of rural and urban firefighting operations. This tank eliminates problems with insufficient or unusable water sources. In remote areas, the self-erecting tank is designed to provide water in emergencies and for water transportation. It ensures a continuous, portable water supply. In such areas, the tank can be filled by pumping water from natural sources such as rivers or streams using a small gasoline-powered pump. Once the self-erecting tank is filled with water, it automatically becomes self-supporting due to its unique design. The self-erecting tank requires no additional support structures, assembly or framing. When it is no longer needed, the water can be drained quickly through an opening on the side. The tank is fully collapsible and can be easily stored in its own compact storage bag.

Technical data:

Color: red
Material: HPR
Basis weight: 630 g/m²,



Scope of delivery:

1 pieces Water tank
1 pieces Transport bag

Ord. no.	Volume l	Packing size Ø x L cm	Installation dimensions h x Ø top x Ø bottom cm	Weight g
202290	3.800	46 x 66	81 x 220 x 270	27000

Your authorized specialist dealer:



dönges

FIRE & RESCUE

DÖNGES GmbH & Co. KG

Dönges-Straße 1
D-42929 Wermelskirchen

Phone: +49 2196 97 56-112
firesafety@doenges-online.de
www.doenges-online.de